CHITTENDEN COUNTY RPC
Communities Planning Together

110 West Canal Street, Suite 202
Winooski, Vermont 05404-2109
802-846-4490
www.ccrpcvt.org

TECHNICAL MEMORANDUM

TO: **Linda Blasch, Assistant Town Administrator, Jericho**
FROM: **Sai Kumar Sarepalli, P.E.; CCRPC**
DATE: **05/27/2025**
RE: **Browns Trace Speed Study and Traffic Calming Analysis**

The Town of Jericho requested the Chittenden County Regional Planning Commission (CCRPC) staff to investigate and evaluate safety concerns and traffic calming along Browns Trace between Plains Road and Barber Farm Road through the Jericho Center.

1. Existing Conditions

Browns Trace is a paved road classified by the state as a Class II Town Highway and functionally classified as a Minor Arterial. The study area extends from Plains Road to the intersection of Barber Farm Road. The posted speed limit on this segment within the study area is 25 mph. Figure 1 shows the study area.

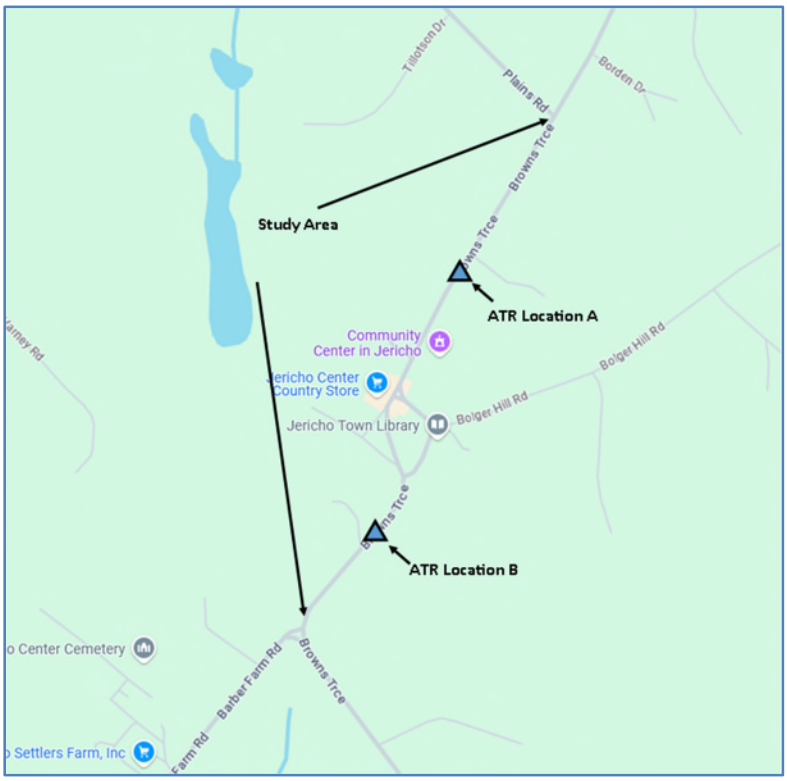

Figure 1: Study Area and ATR Locations

Field Observations

The CCRPC staff conducted a field reconnaissance survey to observe the traffic operations, land use and roadway characteristics, and pedestrian and bicycle activities in the study area. The following are some of the observations along the study area:

- Primarily residential land use, agricultural and some commercial properties along Browns Trace in the study area.
- Pavement width varies between 20 ft and 22 ft with narrow gravel shoulders and no edge lines.
- Radar speed feedback signs are located within the study area.
- Jericho Center Country Store is located within the study area.
- Crosswalks are located within the study area.
- A raised crosswalk is located between the small parking area and the Country Store.
- A separated concrete sidewalk is located along the road within the study area.

Figure 2: Country Store, Raised Crosswalk and Parking Area

Traffic Volume and Speed Data Analysis

The CCRPC staff installed an Automatic Traffic Recorder (ATR) on Browns Trace to collect traffic volume and speed data. The data were collected from 09/19/2024 through 09/25/2024. Pedestrian and bicyclist data were not collected. The following table shows directional average, 85th percentile speed, 10 mph pace speed and Average Daily Traffic (ADT).

Table 1: Volume and Speed Data

	Location A			Location B		
	NB	SB	Combined	NB	SB	Combined
Average Speed in MPH	35	30	32	31	30	30
85th Percentile Speed in MPH	38	33	36	35	31	33
10 MPH Pace Speed	31-40	26-35	26-35	26-35	26-35	26-35
Average Daily Traffic (ADT) veh/day	5,037			4,921		

It is evident from the data that motorists are traveling at slightly higher speeds at Location A (north of the center) exceeding the posted speed limit in both directions. The northbound traffic leaving the

center at Location A is traveling at slightly higher speed than the southbound traffic. The 85th percentile speed in both travel directions at both locations shows that traveling speeds are at least 5 mph more than the posted speed limit. The 85th percentile speed is defined as the speed at which 85 percent of motorists are traveling at or below.

2. Traffic Calming

The Federal Highway Administration (FHWA) describes traffic calming as *"supporting the livability and vitality of residential and commercial areas through improvements in non-motorist safety, mobility, and comfort. These objectives are typically achieved by reducing vehicle speeds or volumes on a single street or a street network. Traffic calming measures consist of* ***horizontal, vertical, lane narrowing, roadside, and other features that use self-enforcing physical or psycho-perception means*** *to produce desired effects.[1]"*

The primary traffic calming objectives are:

1. Achieving slower vehicle speeds
2. Increasing the safety and perception of safety for non-motorized users
3. Increasing the quality of life in residential and commercial areas
4. Reducing the necessity of police enforcement
5. Increasing access for all modes of transportation

Traffic Calming Measures

The applicability of traffic calming measures depends on roadway characteristics, land use and desired effects such as lowering speed, reducing volumes or increasing safety. Traffic calming measures can be categorized primarily into four types:

1. Horizontal Deflection
2. Vertical Deflection
3. Road or Lane Narrowing
4. Routing Restriction

The following table shows a list of typical traffic calming measures.

Table 2: Typical Traffic Calming Measures

Horizontal Deflection	Vertical Deflection	Road/Lane Narrowing	Routing Restriction
Lateral Shift	Speed Hump	Curb/Corner Extension	Diagonal Diverter
Chicane	Speed Cushion	Choker	Full Road Closure
Realigned Intersection	Speed Table	Median Island	Half Road Closure
Traffic Circle	Offset Speed Table	On-street Parking	Median Barrier
Small and Mini Roundabout	Raised Crosswalk	Road Diet	Forced Turn Island
	Raised Intersection		

[1] https://safety.fhwa.dot.gov/speedmgt/ePrimer_modules/module2.cfm

Browns Trace is a two-lane minor arterial road with no shoulders that mostly serves traffic between the Jericho Village and Jericho Center. Given the roadway characteristics of Browns Trace and the vicinity land use, road/lane narrowing, median islands and vertical deflection are acceptable traffic calming measures for the study area that may impact vehicle speeds. Routing restriction measures are not applicable for the study area.

Median Island

According to the FHWA Safety ePrimer, "a median island is a raised island located along the street centerline that narrows the travel lanes at that location". A median island may simply be a painted island and/or textured colored pavement along the road centerline. However, the research found that a median island is most effective in reducing vehicle speeds when it is defined by a raised curb or barrier, delineators, and landscaped to further reduce the open feel of a road.

When a median island is installed at or near the entrance to a village or a neighborhood, it provides a visual cue of change in land use, sense of entering the village area to the motorists. Eight field studies with median islands found speed reductions between the range of 1 mph and 8 mph for 85th percentile speeds. The following table shows different types of median islands, their effectiveness and cost estimate.

Table 3: Type of Median Islands and Cost Estimates

Types of Median Islands	Traffic Calming Effectiveness	Approximate Cost*
	• Simple pavement marking • 12 inches to 14 inches width • Flush with pavement • Vehicles may drive over pavement markings • Less effective in traffic calming	• Low cost at $1.50 to $2.0 per linear foot
	• Centerline tubular posts with pavement marking • 12 inches to 14 inches width between yellow lines • 12 inches to 24 inches tall tubular posts with reflective tape • Tubular posts can be installed on pavement and removed in winter season • Low to medium effectiveness	• Tubular post $30 per each • $1.50 to $2.00 per linear foot for pavement marking

	• Seasonal Center Median with tubular posts and 25 MPH temporary sign that can be removed in winter • 12 inches to 20 inches width • 12 inches to 24 inches tall tubular posts with reflective tape • Tubular posts can be installed on pavement and removed in winter season • Low to medium effectiveness	• Tubular post $30 per each • $30 to $50 per sign
	• Mountable curb with textured surface median • 12 inches to 14 inches wide • Larger vehicles able to mount the curb • Can be supplemented with a speed sign at the beginning of the median • Appropriate at the entrance of the village • Medium effectiveness	• $40 to $50 per square foot • $35 to $50 per sign
	• 4” vertical concrete curb with textured surface median • 16 inches to 24 inches wide • Impede larger vehicles ability to mount the curb • Can be supplemented with a speed sign and/or median sign at the beginning of the median • Appropriate at the entrance of the village • Medium to very effective	• Textured concrete $50 to $75 per square foot • Concrete curb $7 to $12 per linear foot • $35 to $50 per sign

	• Concrete curb with vegetated median • 18 inches to 24 inches wide • Impede larger vehicle's ability to mount the curb • Can be supplemented with a speed sign at the beginning of the median • Steet lights are recommended • Appropriate at the entrance of the village • Very effective	• Concrete curb $7 to $12 per linear foot • Vegetation cost varies depending on type of plants and shrubs • Solar powered Street lights $1,000 to $1,500 each (recommended)
**** Note – Approximate Costs do not include labor charges*** ***Pictures are taken from the internet***		

3. Considerations and Recommendations

Speed management and speed control are a significant challenge for local municipalities, especially through small rural communities. Browns Trace functionality changes from a higher speed (35 mph) arterial road outside the Jericho Center to a lower speed (25 mph) within the study area. The land-use characteristics within the study area consist of residential and agricultural use, community center, Country Store with a village setting environment. These land-use characteristics have the potential to generate walking and biking traffic in the study area. Law enforcement alone may accomplish speed management for a temporary period at significantly higher costs and cannot address the safety and speeding issue permanently. Traffic calming measures, as discussed earlier, should be implemented strategically along Browns Trace to address speeding and road users' safety within the study area. According to the FHWA, agencies often set speed limits concurrently with implementing speed management strategies such as traffic calming measures and increased enforcement to achieve desired operating speeds[1].

This memo provides feasible and acceptable traffic calming measures for the Town's discretion and assists in making an informed decision for implementation. The Town can pick and choose from the traffic calming measures listed depending on available budget and public feedback. The following are some considerations and recommendations for implementing traffic calming measures along Browns Trace between Plains Road and Barber Farm Road.

1. Install fog/white line from 4 to 6 inches wide along the edge of pavement. Research has found that wider edge line pavement markings have a positive safety relationship on rural two-lane two-way highways[2].
2. Install speed limit pavement legend (25 MPH) pavement markings at appropriate locations within the study area. See sample pictures below.

[1] https://safety.fhwa.dot.gov/provencountermeasures/appropriate-speed-limits.cfm
[2] https://safety.fhwa.dot.gov/roadway_dept/night_visib/pavement_marking/ch3.cfm

3. Install raised crosswalk at locations shown in the attached implementation plan.
4. Install warning chevron signs along the curve shown in the attached implementation plan.
5. Install a raised crosswalk ahead warning sign at the location shown in the attached implementation plan.
6. Install gateway signage at the entrance of the Jericho Center in both directions. Gateway signs provide a cue to motorists that they are entering a different land use area, village settings, where multimodal road uses are expected. See the attached traffic calming details.
7. Mount pole banners on utility poles (with consent from the utility company) approaching the center area along Browns Trace. Pole banners are customizable depending on the season, special events etc., and can enhance the village setting by creating a sense of attraction.
8. Install median islands with pavement markings or textured pavement of 50 ft to 100 ft in length within the study area. Maintain at least 9 ft travel lanes at the median locations. See the attached implementation plan for approximate location.
9. As a low-cost measure, the Town can install the Vermont Standard “Unsafe to Pass” (VW-092) sign

at appropriate locations in both travel directions within the study area to discourage unsafe passing.
10. A traffic calming implementation plan is attached with this memo. The traffic calming measures and signs are shown at approximate locations. Actual locations should be surveyed in the field prior to installation.

Attachment A

Traffic Calming Measures Implementation Plan

Note: Approximate locations are shown in the Plan. Actual locations should be field verified.

<u>Traffic Calming Measures:</u>

(1,9) – Gateway Signage with Landscape

(2,8) – Centerline Median Island

(3,7) – Raised Crosswalk with ADA Ramps

(4) – Raised Crosswalk Ahead Warning Sign

(5) – Raised Crosswalk with ADA Ramps at the Country Store

(6) – Chevron Warning Signs for the Curve

Attachment B

Traffic Calming Measures Details

Gateway Signage with Landscape

Centerline Median Island on the south side of the center

Chevron Warning Signs along the Curve

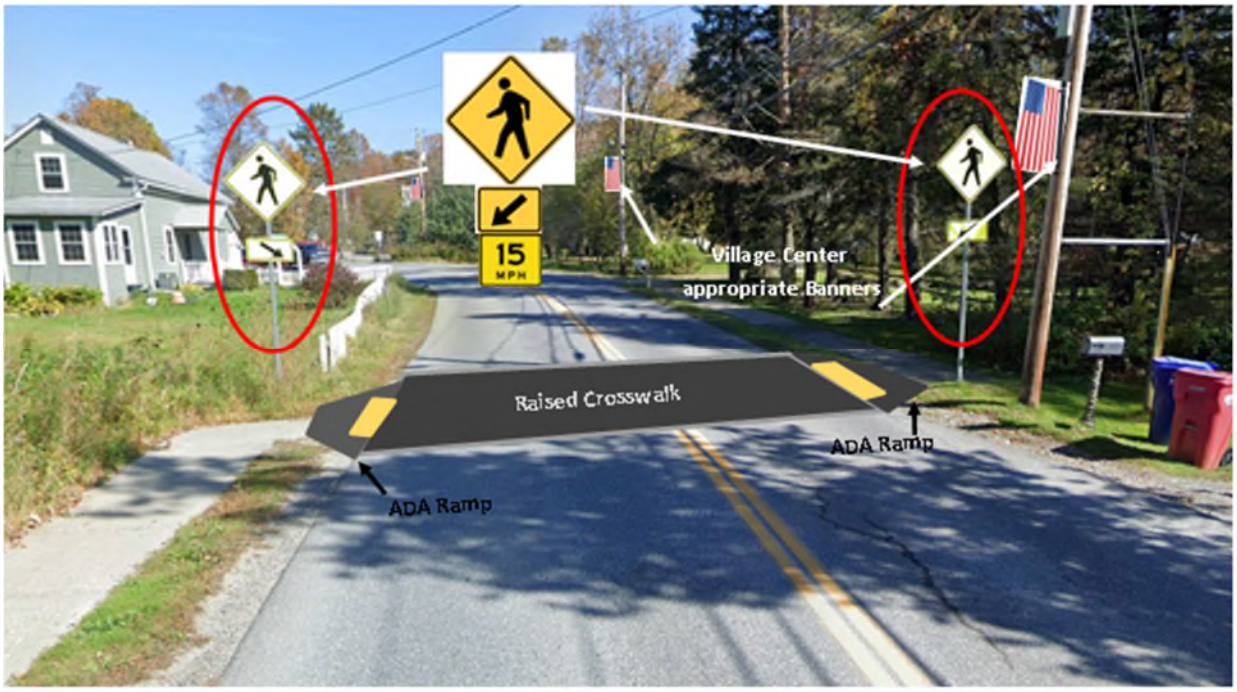

Figure 3B-30. Pavement Markings for Speed Tables or Speed Humps with Crosswalks

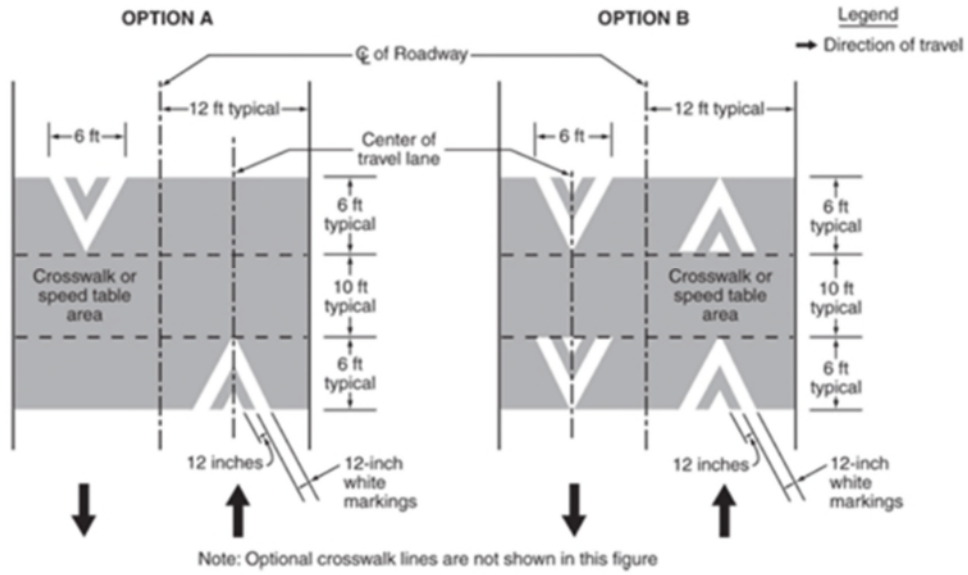

Raised Crosswalk with ADA Ramps details

Figure 3B-30. Pavement Markings for Speed Tables or Speed Humps with Crosswalks

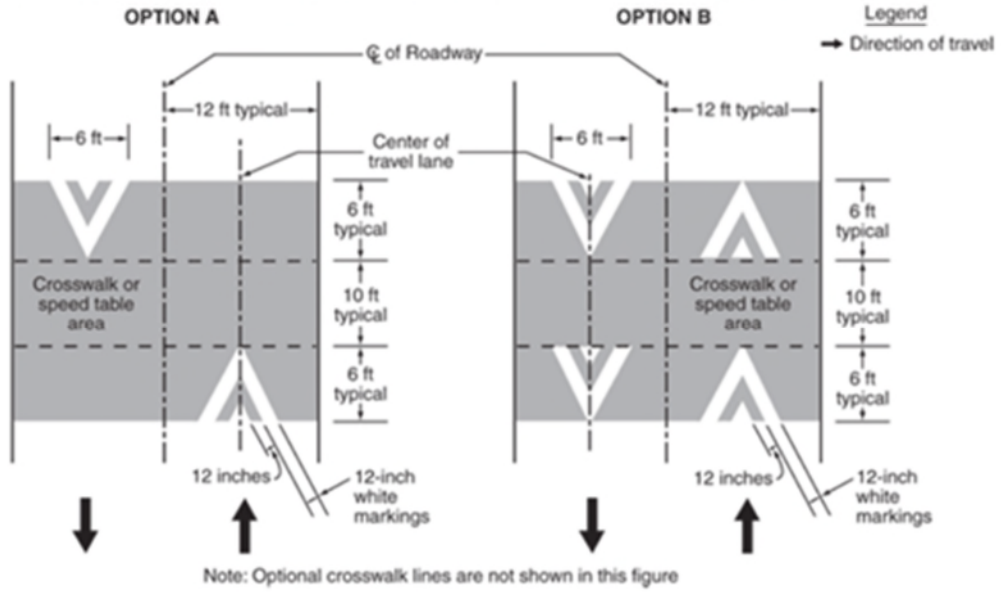

Raised Crosswalk with ADA Ramps at the Country Store

Advanced Raised Crosswalk Warning Sign

Relocate the Existing Speed sign closer to the Road and clear vegetation

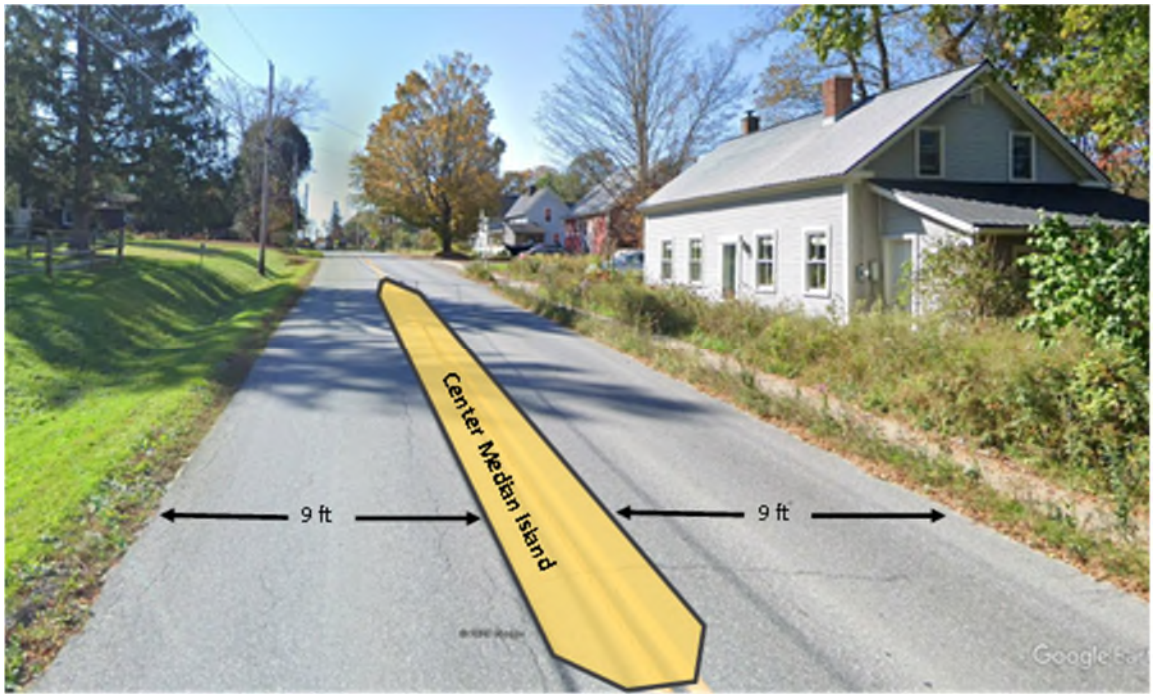

Centerline Median Island on the north side of the Center

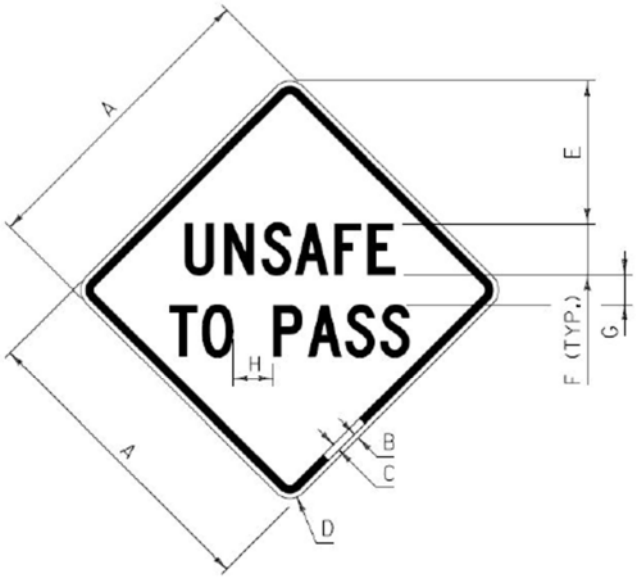

VW–092

A	B	C	D	E	F	G	H
30	1/2	3/4	1 7/8	13 7/8	5C	3	4
36	5/8	7/8	2 1/4	16	6C	4	5

Unsafe To Pass Sign with Yellow background

Attachment C
Speed and Volume Data

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/19/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	2	0	0	0	0	0	0	0	0	2
1:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2:00	0	0	0	1	0	0	0	1	0	0	0	0	0	2
3:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
4:00	0	0	0	0	4	4	1	0	1	0	0	0	0	10
5:00	0	0	0	12	21	9	2	1	0	0	0	0	0	45
6:00	1	0	24	60	46	22	3	0	0	0	0	0	0	156
7:00	8	3	35	148	124	23	1	0	0	0	0	0	3	345
8:00	8	2	33	96	98	12	1	0	1	0	0	0	2	253
9:00	2	0	24	53	38	15	0	1	0	1	0	0	0	134
10:00	2	1	8	62	37	10	3	0	0	0	0	0	0	123
11:00	4	0	18	55	39	14	1	0	0	1	0	0	0	132
12:00 PM	3	0	11	61	51	10	1	0	0	0	0	0	0	137
1:00	0	0	16	41	44	15	1	0	0	0	0	0	0	117
2:00	3	1	16	56	56	13	4	0	0	0	0	0	0	149
3:00	9	3	31	109	89	24	2	3	0	0	0	0	0	270
4:00	7	0	21	88	77	16	2	0	0	0	0	0	0	211
5:00	16	0	29	99	82	19	2	0	1	0	0	0	1	249
6:00	5	0	20	60	60	14	2	0	0	0	0	0	1	162
7:00	1	0	6	56	35	3	2	1	0	0	0	0	0	104
8:00	0	0	20	76	41	10	4	1	0	0	0	0	0	152
9:00	0	0	3	13	11	4	0	0	0	0	0	0	0	31
10:00	0	0	3	7	3	3	0	0	0	0	0	0	0	16
11:00	0	0	0	3	4	0	0	0	0	0	0	0	0	7
Total	69	10	318	1156	963	240	32	8	3	2	0	0	7	2808

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/20/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	3	0	0	0	0	0	0	0	0	4
1:00	0	0	0	0	0	2	0	0	0	0	0	0	0	2
2:00	0	0	0	0	0	0	0	0	1	0	0	0	0	1
3:00	0	0	0	0	3	0	1	0	0	0	0	0	0	4
4:00	0	1	1	1	2	3	0	1	0	0	0	0	0	9
5:00	1	0	2	18	5	12	1	0	0	0	0	0	0	39
6:00	3	0	15	38	48	19	3	1	0	0	0	0	0	127
7:00	15	0	18	117	113	32	3	1	0	1	0	0	0	300
8:00	8	0	25	122	96	18	1	0	1	0	0	0	0	271
9:00	3	0	15	58	51	9	2	0	0	0	0	0	0	138
10:00	6	1	11	55	44	10	1	0	0	0	0	0	1	129
11:00	3	1	14	82	44	19	3	0	0	0	0	0	0	166
12:00 PM	4	2	11	61	51	15	1	1	0	0	0	0	0	146
1:00	3	0	15	70	51	13	5	2	0	0	0	0	0	159
2:00	4	0	15	72	61	10	4	0	0	0	0	0	0	166
3:00	13	5	36	135	103	13	3	1	0	0	0	0	0	309
4:00	4	0	15	103	79	22	0	1	0	0	0	0	1	225
5:00	4	3	33	65	73	17	1	0	0	0	0	0	1	197
6:00	1	0	16	65	27	5	0	0	0	0	0	0	0	114
7:00	2	0	13	38	35	12	1	0	0	0	0	0	0	101
8:00	0	0	6	29	22	5	1	0	0	0	0	0	0	63
9:00	1	0	1	15	9	4	3	1	1	0	0	0	1	36
10:00	0	0	2	9	2	4	1	1	0	0	0	0	0	19
11:00	0	0	2	5	4	1	1	0	0	0	0	0	0	13
Total	75	13	266	1159	926	245	36	10	3	1	0	0	4	2738

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/21/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	0	1	0	0	0	0	0	0	0	2
1:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2:00	0	0	0	0	0	0	1	0	0	0	0	0	0	1
3:00	0	0	0	1	0	0	0	1	0	0	0	0	0	2
4:00	0	0	0	2	3	0	0	0	0	0	0	0	0	5
5:00	0	0	2	10	11	2	1	0	0	0	0	0	0	26
6:00	1	1	2	11	20	7	2	0	0	0	0	0	0	44
7:00	1	0	6	38	43	13	2	0	0	0	0	0	0	103
8:00	0	0	11	44	42	30	2	0	0	0	0	0	0	129
9:00	5	0	14	69	74	20	1	0	0	0	0	0	1	184
10:00	3	0	10	75	60	20	3	0	0	0	0	0	0	171
11:00	4	0	22	62	72	32	4	1	0	0	0	0	0	197
12:00 PM	3	0	16	65	84	22	4	0	0	0	0	0	0	194
1:00	8	0	9	63	55	22	5	0	0	0	0	0	0	162
2:00	8	0	5	45	49	20	7	1	0	1	0	0	0	136
3:00	1	2	7	34	54	20	3	0	0	0	0	0	1	122
4:00	7	0	19	55	67	18	6	0	0	0	0	1	0	173
5:00	6	1	5	56	62	17	3	0	0	0	0	1	0	151
6:00	6	3	8	52	60	14	1	0	1	0	0	0	0	145
7:00	2	0	6	36	37	8	1	0	0	0	0	0	0	90
8:00	2	0	5	40	22	7	2	0	0	0	0	0	0	78
9:00	1	0	2	15	16	2	0	0	1	0	0	0	0	37
10:00	0	0	1	6	8	4	0	1	0	0	0	0	0	20
11:00	0	0	1	3	5	3	0	0	0	0	0	0	0	12
Total	58	7	151	783	844	282	48	4	2	1	0	2	2	2184

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Location ID: JERI17 - Browns Trace Road North of Village Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/22/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	3	2	1	1	0	0	0	0	0	9
1:00	0	0	0	1	1	0	0	0	0	0	0	0	0	2
2:00	0	0	0	0	0	0	1	0	0	0	0	0	0	1
3:00	0	0	1	1	0	1	0	0	0	0	0	0	0	3
4:00	0	0	1	0	4	0	0	0	0	0	0	0	0	5
5:00	0	0	2	5	5	7	1	0	0	0	0	0	0	20
6:00	0	0	2	13	14	7	1	0	0	0	0	0	0	37
7:00	0	0	5	20	21	12	4	1	0	0	0	0	0	63
8:00	4	0	6	44	35	11	2	0	0	0	0	0	0	102
9:00	6	0	6	62	55	17	2	1	0	0	0	0	0	149
10:00	3	0	14	75	56	22	4	1	0	0	0	0	0	175
11:00	4	0	7	66	69	28	1	1	0	0	0	0	0	176
12:00 PM	5	0	7	48	78	24	5	2	0	0	0	0	0	169
1:00	5	1	7	66	72	26	9	0	0	0	0	0	0	186
2:00	6	0	7	53	51	19	5	1	0	0	0	0	1	143
3:00	7	0	7	45	54	19	3	1	0	0	0	0	0	136
4:00	2	1	3	40	47	15	5	0	1	0	0	0	0	114
5:00	3	1	12	50	20	17	4	0	0	0	0	0	0	107
6:00	5	0	16	35	39	20	1	0	0	0	0	0	0	116
7:00	3	0	9	33	27	9	0	1	0	0	0	0	0	82
8:00	0	0	2	11	14	7	1	0	0	0	0	0	0	35
9:00	1	0	1	10	7	4	0	0	0	0	0	0	0	23
10:00	0	0	0	4	4	1	0	0	0	0	0	0	0	9
11:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
Total	54	3	115	684	677	268	50	10	1	0	0	0	1	1863

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/23/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	0	0	0	0	0	0	0	0	0	1
1:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
2:00	0	0	0	0	0	0	1	0	0	0	0	0	0	1
3:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
4:00	0	0	1	2	6	1	2	0	0	0	0	0	0	12
5:00	1	0	1	8	18	11	4	0	0	0	0	0	0	43
6:00	3	1	17	52	40	21	5	0	0	0	0	0	0	139
7:00	12	0	30	146	112	15	3	1	1	0	0	0	0	320
8:00	8	0	28	110	84	24	3	0	0	0	0	0	1	258
9:00	6	0	23	55	52	16	0	0	0	0	0	0	0	152
10:00	2	0	8	45	36	17	5	0	0	0	0	0	0	113
11:00	3	0	12	61	50	9	2	0	0	0	0	0	1	138
12:00 PM	1	2	17	58	39	10	2	0	0	0	0	0	0	129
1:00	0	0	19	52	42	14	2	0	0	0	0	0	0	129
2:00	2	0	17	64	53	13	2	0	0	0	0	0	2	153
3:00	5	0	40	125	76	8	1	0	0	0	0	0	0	255
4:00	8	0	18	95	79	5	5	1	0	0	0	0	1	212
5:00	7	0	19	106	62	16	2	0	0	0	0	0	0	212
6:00	4	0	17	83	53	10	0	0	0	0	0	0	0	167
7:00	2	0	8	58	55	12	2	0	0	0	0	0	0	137
8:00	1	0	7	16	10	2	0	0	0	0	0	0	0	36
9:00	1	0	4	10	5	4	0	0	0	0	0	0	0	24
10:00	0	0	0	2	1	2	0	0	0	0	0	0	0	5
11:00	1	0	1	1	1	1	0	1	0	0	0	0	0	6
Total	67	3	287	1150	875	212	41	3	1	0	0	0	5	2644

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/24/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	1	0	0	0	0	0	0	0	0	2
1:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2:00	0	0	0	1	0	0	1	0	0	0	0	0	0	2
3:00	0	0	0	1	2	2	0	0	1	0	0	0	0	6
4:00	0	0	1	1	1	1	0	1	1	0	0	0	0	6
5:00	0	0	2	7	15	9	2	0	0	0	0	0	0	35
6:00	5	1	19	41	58	16	4	0	0	0	0	0	0	144
7:00	16	1	28	154	128	14	1	0	0	0	0	1	0	343
8:00	11	2	29	95	101	28	1	0	0	0	0	0	0	267
9:00	2	1	13	55	61	12	1	1	0	0	0	0	0	146
10:00	0	0	9	42	38	14	1	0	0	0	0	0	0	104
11:00	5	1	7	51	53	27	1	1	0	0	0	1	0	147
12:00 PM	3	0	14	54	54	10	3	0	0	0	0	0	1	139
1:00	3	0	23	64	43	10	1	0	0	0	0	0	0	144
2:00	4	0	11	66	53	14	3	0	0	0	0	0	0	151
3:00	11	2	29	122	69	15	7	0	0	0	0	0	0	255
4:00	2	0	18	92	61	27	2	0	0	0	0	0	0	202
5:00	4	1	20	116	73	16	1	0	0	0	0	1	1	233
6:00	4	0	19	89	77	18	2	0	0	0	0	0	0	209
7:00	0	0	11	43	30	8	2	0	0	0	0	0	0	94
8:00	0	0	2	24	18	7	1	0	0	0	0	0	0	52
9:00	0	0	2	10	4	5	3	0	0	0	0	0	0	24
10:00	0	0	1	4	1	0	0	0	0	0	0	0	0	6
11:00	0	0	1	1	0	1	0	0	0	0	0	0	0	3
Total	70	9	259	1134	941	254	37	3	2	0	0	3	2	2714

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/25/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
2:00	0	0	1	1	0	0	0	0	0	0	0	0	0	2
3:00	0	0	0	0	2	1	0	0	0	0	0	0	0	3
4:00	0	0	1	2	1	2	1	0	1	0	0	0	0	8
5:00	0	0	1	11	14	14	1	1	0	0	0	0	0	42
6:00	3	0	15	46	47	18	1	0	0	0	0	0	0	130
7:00	13	0	28	152	122	43	2	0	0	0	0	0	1	361
8:00	7	0	28	111	86	31	4	1	0	1	0	0	0	269
9:00	5	0	8	50	54	16	1	1	0	0	0	0	0	135
10:00	2	2	21	65	40	10	1	0	0	0	0	0	0	141
11:00	2	1	16	50	50	13	1	0	0	0	0	0	0	133
12:00 PM	2	0	18	65	41	14	1	0	0	0	1	0	0	142
1:00	0	1	12	43	40	16	2	0	0	0	0	0	0	114
2:00	0	0	12	56	50	18	0	0	0	0	0	0	0	136
3:00	10	0	38	111	74	18	2	1	0	0	0	0	1	255
4:00	12	0	22	73	75	16	5	0	0	0	0	0	1	204
5:00	11	1	11	74	90	17	3	1	0	1	0	1	1	211
6:00	4	0	19	91	91	24	4	1	0	0	0	0	0	234
7:00	2	0	12	67	56	15	0	0	0	0	0	0	0	152
8:00	2	0	5	18	13	3	0	0	0	0	0	0	0	41
9:00	0	0	1	8	3	3	0	0	0	0	0	0	0	15
10:00	0	0	0	4	2	1	0	0	0	0	0	0	0	7
11:00	0	0	2	2	0	0	0	0	0	0	0	0	0	4
Total	75	5	271	1100	952	293	29	6	1	2	1	1	4	2740
Grand Total	468	50	1667	7166	6178	1794	273	44	13	6	1	6	25	17691

Stats	Percentile	15th	50th	85th	95th
	Speed	24	29	33	36

Mean Speed (Average)	30.2
10 MPH Pace Speed	26-35
Number in Pace	13342
Percent in Pace	75.0%
Number > 45 MPH	95
Percent > 45 MPH	0.5%

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/19/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	2	0	0	0	0	0	0	0	0	3
1:00	0	0	0	0	2	1	0	0	0	0	0	0	0	3
2:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
3:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00	0	0	0	1	0	0	1	0	0	0	0	0	0	2
5:00	0	0	0	2	6	3	1	2	1	0	0	0	0	15
6:00	1	0	0	10	29	21	7	2	0	0	0	0	0	70
7:00	12	1	1	50	126	53	11	0	0	1	0	0	1	256
8:00	4	0	2	37	87	42	10	2	1	0	0	0	0	185
9:00	1	0	1	17	40	35	5	3	0	0	0	0	1	103
10:00	1	0	0	20	45	30	12	2	0	0	0	0	0	110
11:00	5	1	5	29	40	45	9	1	0	0	0	0	0	135
12:00 PM	1	0	1	7	69	44	16	1	0	0	0	0	0	139
1:00	4	0	1	24	47	36	18	3	0	0	0	0	0	133
2:00	0	0	1	21	62	80	12	4	1	0	0	0	0	181
3:00	3	0	4	39	115	75	13	0	0	0	0	0	0	249
4:00	7	0	0	62	94	96	26	4	2	0	1	0	0	292
5:00	5	0	1	63	178	108	11	3	0	0	0	0	0	369
6:00	2	0	0	40	90	77	8	1	0	0	0	0	1	219
7:00	2	0	7	16	36	21	11	0	1	0	0	0	0	94
8:00	0	0	1	9	26	27	7	1	1	0	0	0	0	72
9:00	0	0	0	3	16	17	6	2	1	0	0	0	0	45
10:00	0	0	0	1	19	14	8	2	1	0	0	0	0	45
11:00	0	0	1	2	6	9	1	1	0	0	0	0	0	20
Total	48	2	26	454	1136	834	193	34	9	1	1	0	3	2741

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/20/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	1	2	4	0	0	0	0	0	0	8
1:00	0	0	0	0	2	2	1	0	0	0	0	0	0	5
2:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
3:00	0	0	0	2	0	1	0	0	0	0	0	0	0	3
4:00	0	0	0	1	1	1	1	0	0	0	0	0	0	4
5:00	0	0	0	0	3	5	3	1	2	0	0	0	0	14
6:00	1	0	1	3	26	19	9	3	0	0	1	0	1	64
7:00	7	0	3	48	120	58	9	2	0	0	0	1	1	249
8:00	1	0	3	40	91	48	6	2	1	0	0	0	0	192
9:00	2	0	0	18	40	31	18	3	0	0	0	0	0	112
10:00	0	0	4	21	29	46	10	1	2	0	0	0	0	113
11:00	2	0	0	13	41	40	8	1	0	0	0	0	0	105
12:00 PM	0	0	1	22	70	70	15	1	0	0	0	0	0	179
1:00	1	1	0	19	60	53	12	3	1	0	0	0	0	150
2:00	2	0	3	22	76	68	21	3	0	0	0	0	0	195
3:00	3	0	7	26	96	84	22	3	0	0	0	0	0	241
4:00	3	0	2	51	121	89	27	4	1	0	0	1	1	300
5:00	6	0	4	31	110	106	18	5	2	0	0	0	0	282
6:00	0	0	0	21	57	53	17	3	1	0	0	0	0	152
7:00	0	0	0	14	46	38	7	4	0	0	0	0	0	109
8:00	0	0	2	9	22	25	8	1	0	0	0	0	0	67
9:00	0	0	2	7	21	18	8	2	1	0	0	0	0	59
10:00	0	0	0	1	12	26	6	3	0	0	0	0	0	48
11:00	0	0	0	0	9	4	3	1	0	0	0	0	0	17
Total	28	1	32	370	1055	887	233	46	11	0	1	2	3	2669

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/21/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	5	4	2	2	0	0	0	0	0	13
1:00	0	0	0	0	1	3	0	2	0	0	0	0	0	6
2:00	0	0	0	1	0	2	2	0	0	0	0	0	0	5
3:00	0	0	0	0	0	3	1	1	0	0	0	0	0	5
4:00	0	0	0	0	0	0	1	1	0	0	0	0	0	2
5:00	0	0	0	4	5	3	1	0	2	0	0	0	0	15
6:00	0	0	1	6	6	18	4	1	0	0	0	0	0	36
7:00	1	0	0	2	14	17	11	2	0	0	0	0	0	47
8:00	1	2	2	11	39	33	12	5	0	0	0	0	0	105
9:00	1	0	1	12	80	81	22	6	0	0	0	0	0	203
10:00	1	1	0	9	46	60	24	3	0	0	0	0	0	144
11:00	1	0	0	16	50	67	35	5	1	0	0	0	0	175
12:00 PM	2	0	2	11	64	62	18	6	1	0	0	0	1	167
1:00	1	0	1	17	58	63	26	2	1	1	0	0	0	170
2:00	0	0	0	12	67	49	22	6	1	0	0	0	1	158
3:00	2	0	2	11	47	87	18	6	0	1	0	0	0	174
4:00	2	1	1	7	75	74	15	2	1	0	0	0	0	178
5:00	1	0	0	19	38	82	20	3	1	0	0	1	1	166
6:00	0	0	1	26	50	36	7	4	0	0	0	0	0	124
7:00	0	0	0	10	44	33	5	2	0	0	0	1	1	96
8:00	0	0	2	18	46	32	8	1	0	0	0	0	0	107
9:00	0	0	1	5	20	15	5	2	0	0	0	0	0	48
10:00	0	0	0	9	21	7	6	2	1	0	0	0	0	46
11:00	0	0	0	1	5	8	6	0	0	0	0	0	0	20
Total	13	4	14	207	781	839	271	64	9	2	0	2	4	2210

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/22/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	4	0	3	0	0	2	0	0	0	9
1:00	0	0	0	0	0	1	1	1	0	0	0	0	0	3
2:00	0	0	0	0	1	0	3	0	0	0	0	0	0	4
3:00	0	0	0	0	1	1	4	0	0	0	0	0	0	6
4:00	0	0	0	0	0	1	0	2	0	0	0	0	0	3
5:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
6:00	0	0	0	1	8	2	2	3	0	0	0	0	0	16
7:00	1	0	2	4	11	12	6	0	0	0	0	0	0	36
8:00	1	0	0	10	35	26	11	2	1	0	0	0	0	86
9:00	1	0	0	12	35	35	13	1	1	0	0	0	0	98
10:00	2	0	1	15	35	51	17	2	0	0	0	0	0	123
11:00	0	0	1	17	60	60	7	2	1	1	0	0	1	150
12:00 PM	1	0	2	16	50	58	28	6	2	0	0	1	0	164
1:00	1	0	0	17	61	54	18	3	0	0	0	0	0	154
2:00	2	0	0	25	61	64	14	1	1	0	0	0	0	168
3:00	3	0	2	10	74	66	17	3	1	0	0	0	0	176
4:00	2	0	0	18	69	69	23	2	1	1	0	0	0	185
5:00	1	0	1	24	57	51	15	2	3	0	0	0	0	154
6:00	0	0	1	14	41	55	5	3	0	0	0	0	0	119
7:00	1	0	3	6	34	22	14	2	0	0	0	0	0	82
8:00	0	0	0	8	26	29	16	1	0	0	0	0	0	80
9:00	0	0	0	3	7	10	9	5	0	1	0	0	0	35
10:00	0	0	0	0	1	8	3	1	0	0	0	0	0	13
11:00	0	0	0	0	0	2	1	1	1	0	0	0	0	5
Total	16	0	13	200	671	678	230	43	12	5	0	1	1	1870

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/23/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	0	1	2	0	0	0	0	0	0	4
1:00	0	0	0	1	0	3	0	0	1	0	0	0	0	5
2:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
3:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00	0	0	0	2	0	1	0	0	0	0	0	0	0	3
5:00	0	0	0	3	7	7	7	1	0	0	0	0	0	25
6:00	1	0	1	9	21	23	2	0	0	0	0	0	0	57
7:00	5	0	5	52	117	55	10	1	1	0	0	1	0	247
8:00	0	0	2	34	95	47	14	0	0	0	0	1	0	193
9:00	1	0	1	13	49	29	12	0	0	0	0	0	0	105
10:00	0	0	0	17	35	31	5	1	0	0	0	0	0	89
11:00	2	0	3	21	49	34	7	0	0	0	0	0	0	116
12:00 PM	0	0	3	23	54	34	14	3	1	0	0	0	0	132
1:00	1	0	4	13	59	40	11	3	0	0	0	0	0	131
2:00	4	0	1	31	83	45	8	3	0	0	0	1	0	176
3:00	6	0	4	61	107	74	7	0	1	1	1	0	0	262
4:00	4	0	6	59	176	95	15	0	0	0	0	0	1	356
5:00	1	0	3	50	139	120	12	2	0	0	0	0	0	327
6:00	0	0	0	23	78	61	12	0	0	0	0	0	0	174
7:00	2	0	1	13	44	27	4	0	0	0	0	0	0	91
8:00	1	0	1	11	27	17	7	1	0	0	0	0	0	65
9:00	0	0	0	4	12	11	6	4	0	0	0	0	0	37
10:00	0	0	0	0	5	5	2	1	3	0	0	0	0	16
11:00	0	0	0	1	2	2	1	1	0	0	0	0	0	7
Total	28	0	35	442	1159	763	158	21	7	1	1	3	1	2619

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/24/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	2	0	2	0	0	0	0	0	0	4
1:00	0	0	0	0	0	3	1	0	1	0	0	0	0	5
2:00	0	0	0	0	1	2	0	0	0	0	0	0	0	3
3:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00	0	0	0	1	2	0	0	0	0	0	0	0	0	3
5:00	0	0	0	1	7	7	2	1	1	0	0	0	0	19
6:00	0	0	0	6	30	20	7	1	1	0	0	0	0	65
7:00	3	0	3	52	120	60	6	2	0	1	0	0	0	247
8:00	3	0	2	25	90	56	16	2	1	0	0	0	0	195
9:00	0	0	0	16	43	47	16	4	0	0	0	0	0	126
10:00	0	0	0	8	37	26	16	5	1	0	0	1	0	94
11:00	1	0	0	23	45	49	16	1	0	0	0	0	0	135
12:00 PM	1	0	1	17	48	51	15	4	0	0	0	0	0	137
1:00	1	0	1	28	46	42	13	2	0	0	0	0	0	133
2:00	2	0	2	30	88	51	9	2	0	0	0	0	0	184
3:00	6	4	9	26	87	95	24	2	0	0	0	0	1	254
4:00	4	0	10	57	146	135	30	1	0	0	1	0	0	384
5:00	4	0	3	55	158	92	14	2	0	0	0	0	0	328
6:00	4	0	3	31	102	52	13	1	0	0	0	0	0	206
7:00	0	0	2	7	43	38	9	1	0	0	0	0	0	100
8:00	0	0	0	3	22	30	11	1	2	1	0	0	0	70
9:00	0	0	0	5	12	13	4	2	1	2	0	0	0	39
10:00	0	0	0	0	4	2	6	2	0	0	0	0	0	14
11:00	0	0	0	2	1	2	2	0	0	0	0	0	0	7
Total	29	4	36	393	1134	873	232	36	8	4	1	1	1	2752

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/25/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	1	1	0	0	0	0	0	0	0	2
1:00	0	0	0	1	1	2	1	0	0	0	0	0	0	5
2:00	0	0	0	0	1	0	1	0	0	0	0	0	0	2
3:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00	1	0	0	1	1	1	0	1	0	0	0	0	0	5
5:00	0	0	0	3	7	2	1	2	0	0	0	0	0	15
6:00	0	0	0	11	34	25	7	1	0	0	0	0	0	78
7:00	2	0	7	41	130	62	7	1	0	0	0	1	0	251
8:00	3	0	0	27	83	40	9	2	0	1	0	0	1	166
9:00	2	0	1	17	48	37	10	2	0	0	0	0	0	117
10:00	1	0	1	25	39	20	10	0	0	0	0	0	0	96
11:00	0	0	2	12	42	27	10	2	0	0	0	0	0	95
12:00 PM	3	0	0	19	55	29	11	3	0	0	0	0	0	120
1:00	3	1	1	18	70	40	7	4	0	0	0	0	0	144
2:00	0	0	1	29	65	32	23	2	0	0	0	0	0	152
3:00	9	0	4	74	116	67	25	0	0	0	0	0	0	295
4:00	4	0	6	77	168	117	25	1	0	0	0	0	1	399
5:00	5	1	13	38	153	109	18	1	1	0	1	1	0	341
6:00	2	0	1	20	83	53	5	3	0	1	0	1	1	170
7:00	2	0	0	9	48	41	18	0	0	0	0	0	1	119
8:00	0	0	1	11	33	26	4	0	0	0	0	0	0	75
9:00	0	0	0	6	9	14	4	0	0	0	0	0	0	33
10:00	0	0	0	3	7	4	5	1	0	0	0	0	0	20
11:00	0	0	0	3	3	2	1	0	0	0	0	0	0	9
Total	37	2	38	445	1197	751	202	26	1	2	1	3	4	2709
Grand Total	199	13	194	2511	7133	5625	1519	270	57	15	5	12	17	17570

Stats	Percentile	15th	50th	85th	95th
	Speed	29	33	38	41

Mean Speed (Average)	34.8
10 MPH Pace Speed	31-40
Number in Pace	12753
Percent in Pace	73.0%
Number > 45 MPH	376
Percent > 45 MPH	2.1%

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI17 - Browns Trace Road North of Village Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/19/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	4	0	0	0	0	0	0	0	0	5
1:00	0	0	0	0	2	1	0	0	0	0	0	0	0	3
2:00	0	0	0	1	1	0	0	1	0	0	0	0	0	3
3:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
4:00	0	0	0	1	4	4	2	0	1	0	0	0	0	12
5:00	0	0	0	14	27	12	3	3	1	0	0	0	0	60
6:00	2	0	24	70	75	43	10	2	0	0	0	0	0	226
7:00	20	4	36	198	250	76	12	0	0	1	0	0	4	601
8:00	12	2	35	133	185	54	11	2	2	0	0	0	2	438
9:00	3	0	25	70	78	50	5	4	0	1	0	0	1	237
10:00	3	1	8	82	82	40	15	2	0	0	0	0	0	233
11:00	9	1	23	84	79	59	10	1	0	1	0	0	0	267
12:00 PM	4	0	12	68	120	54	17	1	0	0	0	0	0	276
1:00	4	0	17	65	91	51	19	3	0	0	0	0	0	250
2:00	3	1	17	77	118	93	16	4	1	0	0	0	0	330
3:00	12	3	35	148	204	99	15	3	0	0	0	0	0	519
4:00	14	0	21	150	171	112	28	4	2	0	1	0	0	503
5:00	21	0	30	162	260	127	13	3	1	0	0	0	1	618
6:00	7	0	20	100	150	91	10	1	0	0	0	0	2	381
7:00	3	0	13	72	71	24	13	1	1	0	0	0	0	198
8:00	0	0	21	85	67	37	11	2	1	0	0	0	0	224
9:00	0	0	3	16	27	21	6	2	1	0	0	0	0	76
10:00	0	0	3	8	22	17	8	2	1	0	0	0	0	61
11:00	0	0	1	5	10	9	1	1	0	0	0	0	0	27
Total	117	12	344	1610	2099	1074	225	42	12	3	1	0	10	5549

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/20/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	4	2	4	0	0	0	0	0	0	12
1:00	0	0	0	0	2	4	1	0	0	0	0	0	0	7
2:00	0	0	0	0	1	0	0	0	1	0	0	0	0	2
3:00	0	0	0	2	3	1	1	0	0	0	0	0	0	7
4:00	0	1	1	2	3	4	1	1	0	0	0	0	0	13
5:00	1	0	2	18	8	17	4	1	2	0	0	0	0	53
6:00	4	0	16	41	74	38	12	4	0	0	1	0	1	191
7:00	22	0	21	165	233	90	12	3	0	1	0	1	1	549
8:00	9	0	28	162	187	66	7	2	2	0	0	0	0	463
9:00	5	0	15	76	91	40	20	3	0	0	0	0	0	250
10:00	6	1	15	76	73	56	11	1	2	0	0	0	1	242
11:00	5	1	14	95	85	59	11	1	0	0	0	0	0	271
12:00 PM	4	2	12	83	121	85	16	2	0	0	0	0	0	325
1:00	4	1	15	89	111	66	17	5	1	0	0	0	0	309
2:00	6	0	18	94	137	78	25	3	0	0	0	0	0	361
3:00	16	5	43	161	199	97	25	4	0	0	0	0	0	550
4:00	7	0	17	154	200	111	27	5	1	0	0	1	2	525
5:00	10	3	37	96	183	123	19	5	2	0	0	0	1	479
6:00	1	0	16	86	84	58	17	3	1	0	0	0	0	266
7:00	2	0	13	52	81	50	8	4	0	0	0	0	0	210
8:00	0	0	8	38	44	30	9	1	0	0	0	0	0	130
9:00	1	0	3	22	30	22	11	3	2	0	0	0	1	95
10:00	0	0	2	10	14	30	7	4	0	0	0	0	0	67
11:00	0	0	2	5	13	5	4	1	0	0	0	0	0	30
Total	103	14	298	1529	1981	1132	269	56	14	1	1	2	7	5407

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/21/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	5	5	2	2	0	0	0	0	0	15
1:00	0	0	0	0	1	3	0	2	0	0	0	0	0	6
2:00	0	0	0	1	0	2	3	0	0	0	0	0	0	6
3:00	0	0	0	1	0	3	1	2	0	0	0	0	0	7
4:00	0	0	0	2	3	0	1	1	0	0	0	0	0	7
5:00	0	0	2	14	16	5	2	0	2	0	0	0	0	41
6:00	1	1	3	17	26	25	6	1	0	0	0	0	0	80
7:00	2	0	6	40	57	30	13	2	0	0	0	0	0	150
8:00	1	2	13	55	81	63	14	5	0	0	0	0	0	234
9:00	6	0	15	81	154	101	23	6	0	0	0	0	1	387
10:00	4	1	10	84	106	80	27	3	0	0	0	0	0	315
11:00	5	0	22	78	122	99	39	6	1	0	0	0	0	372
12:00 PM	5	0	18	76	148	84	22	6	1	0	0	0	1	361
1:00	9	0	10	80	113	85	31	2	1	1	0	0	0	332
2:00	8	0	5	57	116	69	29	7	1	1	0	0	1	294
3:00	3	2	9	45	101	107	21	6	0	1	0	0	1	296
4:00	9	1	20	62	142	92	21	2	1	0	0	1	0	351
5:00	7	1	5	75	100	99	23	3	1	0	0	2	1	317
6:00	6	3	9	78	110	50	8	4	1	0	0	0	0	269
7:00	2	0	6	46	81	41	6	2	0	0	0	1	1	186
8:00	2	0	7	58	68	39	10	1	0	0	0	0	0	185
9:00	1	0	3	20	36	17	5	2	1	0	0	0	0	85
10:00	0	0	1	15	29	11	6	3	1	0	0	0	0	66
11:00	0	0	1	4	10	11	6	0	0	0	0	0	0	32
Total	71	11	165	990	1625	1121	319	68	11	3	0	4	6	4394

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI17 - Browns Trace Road North of Village Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/22/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	7	2	4	1	0	2	0	0	0	18
1:00	0	0	0	1	1	1	1	1	0	0	0	0	0	5
2:00	0	0	0	0	1	0	4	0	0	0	0	0	0	5
3:00	0	0	1	1	1	2	4	0	0	0	0	0	0	9
4:00	0	0	1	0	4	1	0	2	0	0	0	0	0	8
5:00	0	0	2	5	5	8	1	0	0	0	0	0	0	21
6:00	0	0	2	14	22	9	3	3	0	0	0	0	0	53
7:00	1	0	7	24	32	24	10	1	0	0	0	0	0	99
8:00	5	0	6	54	70	37	13	2	1	0	0	0	0	188
9:00	7	0	6	74	90	52	15	2	1	0	0	0	0	247
10:00	5	0	15	90	91	73	21	3	0	0	0	0	0	298
11:00	4	0	8	83	129	88	8	3	1	1	0	0	1	326
12:00 PM	6	0	9	64	128	82	33	8	2	0	0	1	0	333
1:00	6	1	7	83	133	80	27	3	0	0	0	0	0	340
2:00	8	0	7	78	112	83	19	2	1	0	0	0	1	311
3:00	10	0	9	55	128	85	20	4	1	0	0	0	0	312
4:00	4	1	3	58	116	84	28	2	2	1	0	0	0	299
5:00	4	1	13	74	77	68	19	2	3	0	0	0	0	261
6:00	5	0	17	49	80	75	6	3	0	0	0	0	0	235
7:00	4	0	12	39	61	31	14	3	0	0	0	0	0	164
8:00	0	0	2	19	40	36	17	1	0	0	0	0	0	115
9:00	1	0	1	13	14	14	9	5	0	1	0	0	0	58
10:00	0	0	0	4	5	9	3	1	0	0	0	0	0	22
11:00	0	0	0	0	1	2	1	1	1	0	0	0	0	6
Total	70	3	128	884	1348	946	280	53	13	5	0	1	2	3733

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/23/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	0	1	2	0	0	0	0	0	0	5
1:00	0	0	0	1	1	3	0	0	1	0	0	0	0	6
2:00	0	0	0	0	0	1	1	0	0	0	0	0	0	2
3:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
4:00	0	0	1	4	6	2	2	0	0	0	0	0	0	15
5:00	1	0	1	11	25	18	11	1	0	0	0	0	0	68
6:00	4	1	18	61	61	44	7	0	0	0	0	0	0	196
7:00	17	0	35	198	229	70	13	2	2	0	0	1	0	567
8:00	8	0	30	144	179	71	17	0	0	0	0	1	1	451
9:00	7	0	24	68	101	45	12	0	0	0	0	0	0	257
10:00	2	0	8	62	71	48	10	1	0	0	0	0	0	202
11:00	5	0	15	82	99	43	9	0	0	0	0	0	1	254
12:00 PM	1	2	20	81	93	44	16	3	1	0	0	0	0	261
1:00	1	0	23	65	101	54	13	3	0	0	0	0	0	260
2:00	6	0	18	95	136	58	10	3	0	0	0	1	2	329
3:00	11	0	44	186	183	82	8	0	1	1	1	0	0	517
4:00	12	0	24	154	255	100	20	1	0	0	0	0	2	568
5:00	8	0	22	156	201	136	14	2	0	0	0	0	0	539
6:00	4	0	17	106	131	71	12	0	0	0	0	0	0	341
7:00	4	0	9	71	99	39	6	0	0	0	0	0	0	228
8:00	2	0	8	27	37	19	7	1	0	0	0	0	0	101
9:00	1	0	4	14	17	15	6	4	0	0	0	0	0	61
10:00	0	0	0	2	6	7	2	1	3	0	0	0	0	21
11:00	1	0	1	2	3	3	1	2	0	0	0	0	0	13
Total	95	3	322	1592	2034	975	199	24	8	1	1	3	6	5263

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/24/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	3	0	2	0	0	0	0	0	0	6
1:00	0	0	0	0	0	3	1	0	1	0	0	0	0	5
2:00	0	0	0	1	1	2	1	0	0	0	0	0	0	5
3:00	0	0	0	1	2	2	0	0	1	0	0	0	0	6
4:00	0	0	1	2	3	1	0	1	1	0	0	0	0	9
5:00	0	0	2	8	22	16	4	1	1	0	0	0	0	54
6:00	5	1	19	47	88	36	11	1	1	0	0	0	0	209
7:00	19	1	31	206	248	74	7	2	0	1	0	1	0	590
8:00	14	2	31	120	191	84	17	2	1	0	0	0	0	462
9:00	2	1	13	71	104	59	17	5	0	0	0	0	0	272
10:00	0	0	9	50	75	40	17	5	1	0	0	1	0	198
11:00	6	1	7	74	98	76	17	2	0	0	0	1	0	282
12:00 PM	4	0	15	71	102	61	18	4	0	0	0	0	1	276
1:00	4	0	24	92	89	52	14	2	0	0	0	0	0	277
2:00	6	0	13	96	141	65	12	2	0	0	0	0	0	335
3:00	17	6	38	148	156	110	31	2	0	0	0	0	1	509
4:00	6	0	28	149	207	162	32	1	0	0	1	0	0	586
5:00	8	1	23	171	231	108	15	2	0	0	0	1	1	561
6:00	8	0	22	120	179	70	15	1	0	0	0	0	0	415
7:00	0	0	13	50	73	46	11	1	0	0	0	0	0	194
8:00	0	0	2	27	40	37	12	1	2	1	0	0	0	122
9:00	0	0	2	15	16	18	7	2	1	2	0	0	0	63
10:00	0	0	1	4	5	2	6	2	0	0	0	0	0	20
11:00	0	0	1	3	1	3	2	0	0	0	0	0	0	10
Total	99	13	295	1527	2075	1127	269	39	10	4	1	4	3	5466

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI17

Location ID: JERI17 - Browns Trace Road North of Village Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters : CD, MD, EF
Latitude: 44.472516
Longitude: -72.971062

9/25/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	1	1	0	0	0	0	0	0	0	2
1:00	0	0	0	1	2	2	1	0	0	0	0	0	0	6
2:00	0	0	1	1	1	0	1	0	0	0	0	0	0	4
3:00	0	0	0	0	2	1	0	0	0	0	0	0	0	3
4:00	1	0	1	3	2	3	1	1	1	0	0	0	0	13
5:00	0	0	1	14	21	16	2	3	0	0	0	0	0	57
6:00	3	0	15	57	81	43	8	1	0	0	0	0	0	208
7:00	15	0	35	193	252	105	9	1	0	0	0	1	1	612
8:00	10	0	28	138	169	71	13	3	0	2	0	0	1	435
9:00	7	0	9	67	102	53	11	3	0	0	0	0	0	252
10:00	3	2	22	90	79	30	11	0	0	0	0	0	0	237
11:00	2	1	18	62	92	40	11	2	0	0	0	0	0	228
12:00 PM	5	0	18	84	96	43	12	3	0	0	1	0	0	262
1:00	3	2	13	61	110	56	9	4	0	0	0	0	0	258
2:00	0	0	13	85	115	50	23	2	0	0	0	0	0	288
3:00	19	0	42	185	190	85	27	1	0	0	0	0	1	550
4:00	16	0	28	150	243	133	30	1	0	0	0	0	2	603
5:00	16	2	24	112	243	126	21	2	1	1	1	2	1	552
6:00	6	0	20	111	174	77	9	4	0	1	0	1	1	404
7:00	4	0	12	76	104	56	18	0	0	0	0	0	1	271
8:00	2	0	6	29	46	29	4	0	0	0	0	0	0	116
9:00	0	0	1	14	12	17	4	0	0	0	0	0	0	48
10:00	0	0	0	7	9	5	5	1	0	0	0	0	0	27
11:00	0	0	2	5	3	2	1	0	0	0	0	0	0	13
Total	112	7	309	1545	2149	1044	231	32	2	4	2	4	8	5449
Grand Total	667	63	1861	9677	13311	7419	1792	314	70	21	6	18	42	35261

Stats	Percentile	15th	50th	85th	95th
	Speed	26	31	36	40

Mean Speed (Average)	32.5
10 MPH Pace Speed	26-35
Number in Pace	22980
Percent in Pace	65.0%
Number > 45 MPH	471
Percent > 45 MPH	1.3%

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/18/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	*	*	*	*	*	*	*	*	*	*	*	*	*	0
1:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
2:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
3:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
4:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
5:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
6:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
7:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
8:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
9:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
12:00 PM	2	1	7	60	58	8	0	0	0	0	1	0	0	137
1:00	0	0	8	60	49	4	1	0	0	0	0	0	0	122
2:00	0	0	7	73	65	11	0	0	0	0	0	0	0	156
3:00	0	0	14	166	87	4	1	1	1	0	0	0	1	275
4:00	2	1	23	107	56	6	0	0	1	0	0	0	1	197
5:00	2	1	18	121	54	4	1	0	0	0	0	0	3	204
6:00	0	0	11	99	53	2	0	0	0	0	0	0	0	165
7:00	0	0	10	80	29	1	0	0	0	0	0	0	0	120
8:00	0	1	7	29	17	0	0	0	0	0	0	0	0	54
9:00	0	0	2	17	8	3	0	0	0	0	0	0	0	30
10:00	0	0	0	8	1	1	0	0	0	0	0	0	0	10
11:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
Total	6	4	107	820	478	44	3	1	2	0	1	0	5	1471

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42

Location ID: JERI42: Browns Trace Road South of Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/19/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	0	0	0	0	0	0	0	0	0	2
1:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2:00	0	0	0	1	0	1	0	0	0	0	0	0	0	2
3:00	0	0	0	1	0	0	0	0	0	0	0	0	0	1
4:00	0	0	0	2	7	1	1	0	0	0	0	0	0	11
5:00	0	0	0	12	24	10	1	0	0	0	0	0	0	47
6:00	0	1	17	74	59	4	1	0	0	0	0	0	0	156
7:00	1	1	30	202	92	2	0	0	0	0	0	0	0	328
8:00	1	0	20	137	82	8	0	1	0	0	0	0	0	249
9:00	0	0	14	64	40	2	0	0	0	1	0	0	0	121
10:00	0	0	15	62	42	5	0	0	0	0	0	0	0	124
11:00	3	1	15	67	37	8	0	0	0	0	0	0	0	131
12:00 PM	0	0	5	60	63	2	1	0	0	0	0	0	0	131
1:00	0	1	9	62	42	7	1	0	0	0	0	0	0	122
2:00	0	0	13	67	55	3	1	0	0	0	0	0	0	139
3:00	1	0	11	139	100	6	0	0	0	0	0	0	1	258
4:00	0	1	17	130	69	4	0	0	0	0	0	0	0	221
5:00	0	9	30	121	56	3	0	0	1	0	0	0	0	220
6:00	1	0	15	87	40	2	1	0	0	0	0	0	0	146
7:00	0	0	12	51	37	3	0	0	0	0	0	0	0	103
8:00	0	1	11	96	42	4	0	0	0	0	0	0	0	154
9:00	0	1	5	14	11	1	0	0	0	0	0	0	0	32
10:00	0	0	2	7	6	0	0	0	0	0	0	0	0	15
11:00	0	0	0	3	4	0	0	0	0	0	0	0	0	7
Total	7	16	241	1461	908	76	7	1	1	1	0	0	1	2720

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/20/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	2	0	0	0	0	0	0	0	0	4
1:00	0	0	0	0	1	1	0	0	0	0	0	0	0	2
2:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
3:00	0	0	0	1	2	1	0	0	0	0	0	0	0	4
4:00	0	0	2	2	3	1	1	0	0	0	0	0	0	9
5:00	0	0	0	16	21	3	0	0	0	0	0	0	0	40
6:00	0	1	15	58	44	8	1	0	0	0	0	0	0	127
7:00	2	3	21	177	97	2	0	0	1	0	0	0	0	303
8:00	0	0	21	151	88	4	2	0	0	0	0	0	0	266
9:00	0	2	7	69	53	3	0	0	0	0	0	0	0	134
10:00	2	0	9	61	50	2	1	0	0	0	0	0	0	125
11:00	1	1	7	72	71	8	0	0	0	0	0	0	0	160
12:00 PM	0	1	7	63	49	2	0	1	0	0	0	0	0	123
1:00	0	1	17	78	56	3	0	0	0	0	0	0	1	156
2:00	1	0	8	87	63	4	0	0	0	0	0	0	0	163
3:00	1	2	29	175	82	5	0	0	0	0	0	0	1	295
4:00	1	1	21	121	62	7	1	0	1	0	0	0	0	215
5:00	0	5	22	104	52	6	1	0	1	1	0	1	1	194
6:00	0	0	12	62	38	2	0	0	0	0	0	0	1	115
7:00	0	0	8	49	39	2	0	0	0	0	0	0	0	98
8:00	0	1	7	27	24	1	1	0	0	0	0	0	0	61
9:00	0	0	2	11	14	4	1	1	1	0	0	0	0	34
10:00	0	0	3	6	7	2	0	0	0	0	0	0	0	18
11:00	0	0	1	5	4	1	1	0	0	0	0	0	0	12
Total	8	18	219	1397	922	73	10	2	4	1	0	1	4	2659

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/21/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	1	1	0	0	0	0	0	0	0	0	2
1:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
3:00	0	0	0	0	1	1	0	0	0	0	0	0	0	2
4:00	0	0	0	2	3	0	0	0	0	0	0	0	0	5
5:00	0	0	0	12	7	7	0	0	0	0	0	0	0	26
6:00	0	0	7	16	19	3	0	0	0	0	0	0	0	45
7:00	0	0	1	51	44	6	0	0	0	0	0	0	0	102
8:00	0	0	14	57	55	5	0	0	0	0	0	0	0	131
9:00	0	1	8	82	76	5	0	1	0	0	0	0	0	173
10:00	0	0	2	91	69	7	0	0	0	0	0	0	0	169
11:00	0	1	7	106	79	2	0	0	0	0	1	0	0	196
12:00 PM	0	0	13	96	79	6	0	0	0	0	0	0	0	194
1:00	1	2	3	82	68	10	0	0	1	0	0	0	1	168
2:00	0	0	9	57	62	8	0	0	0	0	0	0	0	136
3:00	0	2	11	62	45	3	0	0	0	1	0	0	0	124
4:00	0	2	12	95	56	4	1	0	0	0	0	0	0	170
5:00	0	1	12	83	49	2	0	1	0	0	0	0	0	148
6:00	0	1	15	79	34	5	0	0	0	0	1	0	0	135
7:00	0	4	19	41	11	0	0	0	0	0	0	0	0	75
8:00	1	7	18	53	13	4	0	0	0	0	0	0	0	96
9:00	0	0	7	19	23	0	0	0	0	0	0	0	0	49
10:00	0	0	1	11	9	2	0	0	0	0	0	0	0	23
11:00	0	0	0	4	7	2	0	0	0	0	0	0	0	13
Total	2	21	159	1100	811	82	1	2	1	1	2	0	1	2183

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42

Location ID: JERI42: Browns Trace Road South of Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/22/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	7	1	0	0	0	0	0	0	0	10
1:00	0	0	0	0	2	0	0	0	0	0	0	0	0	2
2:00	0	0	0	0	0	0	1	0	0	0	0	0	0	1
3:00	0	0	1	2	0	0	0	0	0	0	0	0	0	3
4:00	0	1	0	2	3	0	0	0	0	0	0	0	0	6
5:00	0	0	1	5	9	7	0	0	0	0	0	0	0	22
6:00	0	0	2	12	18	3	1	0	0	0	0	0	0	36
7:00	0	0	3	23	31	5	0	0	0	0	0	1	0	63
8:00	0	2	4	47	32	4	2	0	0	0	0	0	0	91
9:00	0	0	7	58	61	3	0	0	0	0	0	0	0	129
10:00	1	0	13	93	73	1	1	0	0	0	0	0	0	182
11:00	0	0	14	99	68	8	0	0	0	0	0	0	0	189
12:00 PM	1	0	5	72	87	15	0	0	0	0	0	0	0	180
1:00	1	0	6	82	71	11	2	0	0	0	0	0	0	173
2:00	1	2	13	75	52	3	1	0	0	0	0	1	0	148
3:00	0	0	6	48	67	7	0	0	0	0	0	0	0	128
4:00	0	1	5	66	39	8	0	0	0	0	0	0	0	119
5:00	0	0	13	49	34	5	0	0	0	0	0	0	0	101
6:00	0	1	8	48	37	5	0	0	0	0	0	0	0	99
7:00	0	1	7	37	29	2	0	0	0	0	0	0	0	76
8:00	0	0	4	18	12	7	1	0	0	0	0	0	0	42
9:00	0	0	2	12	6	1	0	0	0	0	0	0	0	21
10:00	0	0	0	5	2	2	0	0	0	0	0	0	0	9
11:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
Total	4	8	114	855	741	98	9	0	0	0	0	2	0	1831

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/23/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	0	0	0	0	0	1	0	0	0	0	1
1:00	0	0	0	1	0	0	0	0	0	0	0	0	0	1
2:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
3:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
4:00	0	0	1	2	7	2	0	0	0	0	0	0	0	12
5:00	0	0	2	12	21	6	2	0	0	0	0	0	0	43
6:00	0	0	18	51	58	8	0	0	1	0	0	0	0	136
7:00	0	3	32	190	74	3	0	0	0	0	0	0	0	302
8:00	0	2	28	155	66	0	2	0	0	0	1	0	0	254
9:00	2	0	22	78	42	1	0	0	0	0	0	0	0	145
10:00	0	0	14	63	39	1	0	0	0	0	0	0	0	117
11:00	0	0	15	81	36	2	0	0	0	0	0	0	0	134
12:00 PM	0	0	11	76	37	1	0	0	0	0	0	0	0	125
1:00	0	0	11	68	44	1	0	0	0	0	0	0	1	125
2:00	0	1	20	79	39	4	0	0	0	0	0	0	0	143
3:00	0	2	24	160	65	3	0	0	0	0	0	0	0	254
4:00	0	2	19	106	65	6	1	0	0	0	2	1	0	202
5:00	1	5	24	116	37	2	0	0	0	0	0	0	0	185
6:00	0	0	16	115	35	3	0	1	0	0	0	0	0	170
7:00	0	0	7	74	47	1	0	0	0	0	0	0	0	129
8:00	0	0	6	22	10	1	1	0	0	0	0	0	1	41
9:00	0	0	2	13	6	3	0	0	0	0	0	0	0	24
10:00	0	0	0	2	1	2	0	0	0	0	0	0	0	5
11:00	0	0	0	1	3	0	0	0	0	0	0	0	0	4
Total	3	15	272	1465	732	52	6	1	2	0	3	1	2	2554

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: South, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/24/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	1	2	0	0	0	0	0	0	0	0	0	3
1:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2:00	0	0	0	1	0	0	0	1	0	0	0	0	0	2
3:00	0	0	0	1	4	1	0	0	0	0	0	0	0	6
4:00	0	0	0	3	1	1	1	0	0	0	0	0	0	6
5:00	0	0	1	10	21	4	0	0	1	0	0	0	0	37
6:00	0	0	19	78	37	4	0	0	0	0	0	0	0	138
7:00	2	0	20	216	83	8	0	0	0	0	0	0	0	329
8:00	1	2	24	151	76	4	0	0	0	0	0	0	1	259
9:00	1	0	2	60	85	9	0	0	0	0	0	0	0	157
10:00	2	0	11	48	39	7	0	0	0	0	0	0	0	107
11:00	0	0	4	42	73	15	3	0	0	0	0	0	0	137
12:00 PM	1	1	5	63	55	9	1	0	0	0	0	0	0	135
1:00	0	2	16	71	34	8	0	0	0	0	0	0	0	131
2:00	0	0	1	89	58	6	0	0	0	0	0	0	0	154
3:00	0	0	16	128	90	14	2	0	0	0	0	0	0	250
4:00	0	0	19	99	63	3	1	1	0	0	1	0	1	188
5:00	3	1	16	122	73	5	0	0	0	0	0	0	0	220
6:00	1	0	23	131	58	2	1	0	0	0	0	0	0	216
7:00	0	0	2	49	29	2	0	0	0	0	0	0	0	82
8:00	0	1	2	23	20	4	1	0	0	0	0	0	0	51
9:00	0	0	0	9	9	3	2	0	0	0	0	0	0	23
10:00	0	0	1	1	4	0	0	0	0	0	0	0	0	6
11:00	0	0	1	0	2	0	0	0	0	0	0	0	0	3
Total	11	7	184	1397	914	109	12	2	1	0	1	0	2	2640
Grand Total	41	89	1296	8495	5506	534	48	9	11	3	7	4	15	16058

Stats	Percentile	15th	50th	85th	95th
	Speed	25	28	31	34
	Mean Speed (Average)	29.7			
	10 MPH Pace Speed	26-35			
	Number in Pace	13999			
	Percent in Pace	87.0%			
	Number > 45 MPH	49			
	Percent > 45 MPH	0.3%			

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/18/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	*	*	*	*	*	*	*	*	*	*	*	*	*	0
1:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
2:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
3:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
4:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
5:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
6:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
7:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
8:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
9:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
12:00 PM	1	0	10	46	53	21	2	0	0	0	0	0	0	133
1:00	1	1	15	51	44	16	4	0	0	0	0	0	0	132
2:00	1	0	9	61	70	28	4	0	0	0	0	0	0	173
3:00	1	1	37	85	77	34	6	1	0	1	0	0	0	243
4:00	2	12	55	113	109	46	7	0	0	0	0	0	0	344
5:00	1	1	29	114	153	46	6	0	1	0	0	0	0	351
6:00	2	2	32	65	58	16	3	0	1	0	0	0	0	179
7:00	0	1	17	41	42	14	2	0	0	0	0	0	0	117
8:00	0	0	10	30	25	14	6	1	1	0	0	0	0	87
9:00	0	0	6	7	18	5	0	0	0	0	0	0	0	36
10:00	0	0	3	8	8	4	1	0	0	0	0	0	0	24
11:00	0	0	0	3	3	0	0	0	0	0	0	0	0	6
Total	9	18	223	624	660	244	41	2	3	1	0	0	0	1825

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/19/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	2	1	1	0	0	0	0	0	0	0	0	4
1:00	0	1	0	0	1	1	0	0	0	0	0	0	0	3
2:00	0	0	0	1	0	0	0	0	0	0	0	0	0	1
3:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00	0	0	0	1	0	0	1	0	0	0	0	0	0	2
5:00	0	0	0	6	5	3	2	0	1	0	0	0	0	17
6:00	0	0	6	21	26	10	3	2	0	1	0	0	1	70
7:00	1	6	57	101	67	15	3	0	0	0	0	0	0	250
8:00	1	7	38	60	44	18	1	2	0	0	1	0	0	172
9:00	0	3	18	39	34	12	5	1	0	0	0	0	0	112
10:00	1	1	21	28	31	19	4	0	0	0	0	0	0	105
11:00	0	0	14	40	47	15	5	1	0	0	0	0	0	122
12:00 PM	0	0	3	57	43	25	4	0	0	0	0	0	1	133
1:00	2	0	13	45	42	23	4	1	0	0	0	0	0	130
2:00	1	0	19	63	64	29	4	1	0	0	0	0	0	181
3:00	1	2	25	73	97	39	6	0	0	0	0	0	0	243
4:00	0	1	23	122	100	43	6	0	0	0	0	0	0	295
5:00	1	4	77	165	90	23	2	1	0	0	0	0	2	365
6:00	0	1	28	78	69	26	5	1	0	0	0	0	0	208
7:00	2	2	8	30	23	13	5	0	0	0	0	0	0	83
8:00	0	0	5	24	26	9	4	0	0	0	0	0	0	68
9:00	0	0	2	13	18	9	3	0	0	0	0	0	0	45
10:00	0	0	4	14	18	11	1	1	0	0	0	0	0	49
11:00	0	0	1	6	10	5	0	0	0	0	0	0	0	22
Total	10	28	364	988	856	348	68	11	1	1	1	0	4	2680

Site Code: JERI42

Location ID: JERI42: Browns Trace Road South of Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/20/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	3	3	3	0	0	0	0	0	0	0	9
1:00	0	0	0	2	2	0	1	0	0	0	0	0	0	5
2:00	0	0	0	1	0	0	0	0	0	0	0	0	0	1
3:00	0	0	1	1	0	1	0	0	0	0	0	0	0	3
4:00	0	0	1	1	2	1	0	0	0	0	0	0	0	5
5:00	0	0	0	4	4	6	2	0	0	0	0	0	0	16
6:00	1	3	6	24	21	15	0	0	0	0	0	0	0	70
7:00	1	14	58	98	75	15	3	1	0	0	0	0	1	266
8:00	0	12	21	77	50	11	1	3	0	0	0	0	1	176
9:00	0	1	11	38	39	14	5	0	1	0	0	0	0	109
10:00	6	1	11	41	28	17	3	0	0	0	0	0	0	107
11:00	1	0	10	32	36	17	3	0	1	0	0	0	0	100
12:00 PM	1	1	15	59	59	27	6	1	0	0	0	0	1	170
1:00	0	0	15	55	46	16	6	0	0	0	0	0	0	138
2:00	1	0	20	59	78	31	4	3	0	0	0	0	0	196
3:00	2	1	27	96	76	34	10	0	0	0	0	1	0	247
4:00	0	6	28	111	103	34	1	2	2	0	0	1	0	288
5:00	0	4	38	106	105	32	3	2	0	0	0	0	1	291
6:00	0	2	12	48	52	22	6	1	0	0	0	0	1	144
7:00	0	0	8	38	39	14	2	0	0	0	0	0	0	101
8:00	0	2	12	33	12	9	5	0	0	0	0	0	0	73
9:00	0	1	11	22	15	10	2	0	0	0	0	0	0	61
10:00	0	0	2	16	21	10	1	1	0	0	0	0	0	51
11:00	0	0	1	3	8	3	3	0	0	0	0	0	0	18
Total	13	48	308	968	874	342	67	14	4	0	0	2	5	2645

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/21/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	6	3	1	0	0	0	0	0	0	12
1:00	0	0	0	1	2	2	1	0	0	0	0	0	0	6
2:00	0	0	2	0	2	1	0	0	0	0	0	0	0	5
3:00	0	0	0	0	2	2	1	0	0	0	0	0	0	5
4:00	0	0	0	0	0	2	0	0	0	0	0	0	0	2
5:00	0	0	5	1	7	2	0	0	0	0	0	0	0	15
6:00	0	0	4	14	10	4	2	1	0	0	0	0	0	35
7:00	0	0	6	18	17	7	3	0	0	0	0	0	0	51
8:00	0	1	10	32	44	16	3	3	0	0	0	0	0	109
9:00	0	3	8	62	77	30	5	2	0	0	0	0	0	187
10:00	0	1	8	39	52	25	8	2	0	1	0	0	0	136
11:00	0	0	20	54	56	34	12	0	0	0	0	0	2	178
12:00 PM	0	3	11	61	69	33	4	0	0	0	0	0	0	181
1:00	0	0	12	53	73	29	5	3	0	0	0	0	0	175
2:00	0	3	17	53	57	27	5	0	0	0	0	0	0	162
3:00	0	3	9	48	72	35	8	1	0	0	0	0	1	177
4:00	2	4	15	62	71	27	6	1	0	0	0	0	0	188
5:00	0	7	13	44	71	29	6	2	0	0	1	0	0	173
6:00	1	6	17	64	29	15	3	0	1	0	0	0	0	136
7:00	2	8	27	34	25	9	2	0	0	0	0	0	0	107
8:00	1	4	21	41	21	3	0	0	0	0	0	0	0	91
9:00	0	0	4	20	8	9	3	2	0	0	0	0	0	46
10:00	0	0	4	19	12	8	2	0	0	0	0	0	0	45
11:00	0	0	3	5	10	4	0	0	0	0	0	0	0	22
Total	6	43	216	727	793	356	80	17	1	1	1	0	3	2244

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42

Location ID: JERI42: Browns Trace Road South of Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/22/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	3	2	1	0	2	0	0	0	0	10
1:00	0	0	0	1	1	0	0	1	0	0	0	0	0	3
2:00	0	0	1	1	0	1	1	0	0	0	0	0	0	4
3:00	0	0	0	2	1	2	1	0	0	0	0	0	0	6
4:00	0	0	0	0	1	1	1	0	0	0	0	0	0	3
5:00	0	0	0	0	1	1	0	0	0	0	0	0	0	2
6:00	0	0	2	6	3	5	0	0	0	0	0	0	0	16
7:00	0	0	0	15	14	4	1	0	0	0	0	0	0	34
8:00	1	1	9	43	31	15	2	1	0	0	0	0	0	103
9:00	0	0	10	37	42	25	10	0	0	0	0	0	0	124
10:00	0	0	11	48	35	21	4	1	0	1	0	0	0	121
11:00	0	0	14	44	54	20	4	1	0	0	0	0	0	137
12:00 PM	1	1	5	37	52	33	9	2	0	0	0	0	0	140
1:00	1	0	6	59	64	25	7	0	1	0	0	0	0	163
2:00	0	1	15	44	61	35	2	0	0	0	0	0	1	159
3:00	0	1	3	33	84	36	4	0	0	0	1	0	0	162
4:00	0	7	16	55	58	39	12	1	1	1	0	0	0	190
5:00	0	0	22	47	57	24	5	1	0	0	0	0	0	156
6:00	0	0	9	43	52	18	6	1	2	0	0	0	0	131
7:00	0	1	10	24	32	10	5	0	0	0	0	0	0	82
8:00	0	0	6	24	28	11	1	0	0	0	0	0	0	70
9:00	0	0	3	7	15	5	5	1	0	0	0	0	0	36
10:00	0	0	0	0	10	2	0	0	0	0	0	0	0	12
11:00	0	0	1	1	1	3	1	0	0	0	0	0	0	7
Total	3	12	143	573	700	338	82	10	6	2	1	0	1	1871

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42

Location ID: JERI42: Browns Trace Road South of Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/23/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	1	1	0	0	0	0	0	0	0	4
1:00	0	0	0	1	2	2	0	0	0	0	0	0	0	5
2:00	0	0	0	0	1	0	0	0	0	0	0	0	0	1
3:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00	0	0	2	0	0	1	0	0	0	0	0	0	0	3
5:00	0	0	0	10	10	3	2	1	0	0	0	0	0	26
6:00	0	0	6	14	23	9	2	0	0	0	0	1	0	55
7:00	4	6	50	114	73	12	3	0	0	0	0	0	1	263
8:00	0	4	13	61	56	28	4	0	2	0	0	0	1	169
9:00	0	0	10	36	36	15	5	1	0	0	0	0	0	103
10:00	0	0	11	38	35	8	2	0	0	0	0	0	0	94
11:00	0	3	12	40	38	20	2	0	0	0	0	0	0	115
12:00 PM	1	0	14	54	34	13	7	1	0	0	0	0	0	124
1:00	0	0	19	44	44	21	3	0	0	0	0	0	0	131
2:00	0	8	24	70	40	23	5	1	0	0	0	0	0	171
3:00	1	4	32	87	97	25	6	0	0	0	0	0	0	252
4:00	0	8	49	125	135	40	5	0	0	0	0	0	2	364
5:00	1	8	44	119	113	28	2	1	0	0	0	0	0	316
6:00	0	2	14	78	59	14	2	1	0	0	0	0	0	170
7:00	0	0	5	25	35	10	1	0	0	0	0	0	0	76
8:00	1	1	8	31	14	11	3	1	0	0	0	0	0	70
9:00	0	0	2	16	6	7	3	0	0	0	0	0	0	34
10:00	0	0	1	6	2	2	3	1	0	0	0	0	0	15
11:00	0	0	0	4	3	2	0	0	0	0	0	0	0	9
Total	8	44	316	975	857	295	60	8	2	0	0	1	4	2570

Site Code: JERI42

Location ID: JERI42: Browns Trace Road South of Center

Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: North, None Specified

Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/24/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	1	2	2	0	0	0	0	0	0	0	0	5
1:00	0	0	0	2	0	3	0	0	0	0	0	0	0	5
2:00	0	0	1	0	2	0	0	0	0	0	0	0	0	3
3:00	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00	0	0	1	2	0	0	0	0	0	0	0	0	0	3
5:00	0	0	1	5	10	5	1	0	1	0	0	0	0	23
6:00	0	0	3	29	24	9	3	0	0	0	0	0	0	68
7:00	4	11	39	113	78	11	3	0	1	0	0	0	0	260
8:00	3	7	19	55	56	27	2	0	0	0	0	0	0	169
9:00	0	0	14	33	33	29	7	1	0	0	0	0	0	117
10:00	0	1	3	33	34	19	7	2	0	0	1	0	0	100
11:00	0	0	5	50	42	26	5	1	0	0	0	0	0	129
12:00 PM	0	1	10	54	41	30	4	1	0	0	0	0	0	141
1:00	0	0	14	50	50	18	4	0	0	0	0	0	0	136
2:00	1	0	13	69	65	23	8	1	0	0	0	0	0	180
3:00	3	1	20	112	88	41	6	1	0	0	0	0	0	272
4:00	2	7	47	110	140	58	10	1	2	0	0	0	0	377
5:00	2	2	49	106	106	42	5	0	0	0	0	0	0	312
6:00	0	4	19	81	66	16	6	0	0	0	0	0	1	193
7:00	0	0	6	36	41	13	3	0	0	0	0	1	0	100
8:00	0	0	2	18	35	8	8	0	0	0	0	0	0	71
9:00	0	0	4	10	13	4	5	0	0	0	1	0	0	37
10:00	0	0	0	4	4	4	1	0	1	0	0	0	0	14
11:00	0	0	0	0	7	1	0	0	0	0	0	0	0	8
Total	15	34	271	974	937	387	88	8	5	0	2	1	1	2723
Grand Total	64	227	1841	5829	5677	2310	486	70	22	5	5	4	18	16558
Stats			Percentile	15th	50th	85th	95th							
			Speed	24	29	35	38							
		Mean Speed (Average)		31.0										
		10 MPH Pace Speed		26-35										
		Number in Pace		11499										
		Percent in Pace		69.0%										
		Number > 45 MPH		124										
		Percent > 45 MPH		0.7%										

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/18/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	*	*	*	*	*	*	*	*	*	*	*	*	*	0
1:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
2:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
3:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
4:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
5:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
6:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
7:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
8:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
9:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
10:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
11:00	*	*	*	*	*	*	*	*	*	*	*	*	*	0
12:00 PM	3	1	17	106	111	29	2	0	0	0	1	0	0	270
1:00	1	1	23	111	93	20	5	0	0	0	0	0	0	254
2:00	1	0	16	134	135	39	4	0	0	0	0	0	0	329
3:00	1	1	51	251	164	38	7	2	1	1	0	0	1	518
4:00	4	13	78	220	165	52	7	0	1	0	0	0	1	541
5:00	3	2	47	235	207	50	7	0	1	0	0	0	3	555
6:00	2	2	43	164	111	18	3	0	1	0	0	0	0	344
7:00	0	1	27	121	71	15	2	0	0	0	0	0	0	237
8:00	0	1	17	59	42	14	6	1	1	0	0	0	0	141
9:00	0	0	8	24	26	8	0	0	0	0	0	0	0	66
10:00	0	0	3	16	9	5	1	0	0	0	0	0	0	34
11:00	0	0	0	3	4	0	0	0	0	0	0	0	0	7
Total	15	22	330	1444	1138	288	44	3	5	1	1	0	5	3296

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/19/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	2	3	1	0	0	0	0	0	0	0	0	6
1:00	0	1	0	0	1	1	0	0	0	0	0	0	0	3
2:00	0	0	0	2	0	1	0	0	0	0	0	0	0	3
3:00	0	0	0	1	0	0	0	0	0	0	0	0	0	1
4:00	0	0	0	3	7	1	2	0	0	0	0	0	0	13
5:00	0	0	0	18	29	13	3	0	1	0	0	0	0	64
6:00	0	1	23	95	85	14	4	2	0	1	0	0	1	226
7:00	2	7	87	303	159	17	3	0	0	0	0	0	0	578
8:00	2	7	58	197	126	26	1	3	0	0	1	0	0	421
9:00	0	3	32	103	74	14	5	1	0	1	0	0	0	233
10:00	1	1	36	90	73	24	4	0	0	0	0	0	0	229
11:00	3	1	29	107	84	23	5	1	0	0	0	0	0	253
12:00 PM	0	0	8	117	106	27	5	0	0	0	0	0	1	264
1:00	2	1	22	107	84	30	5	1	0	0	0	0	0	252
2:00	1	0	32	130	119	32	5	1	0	0	0	0	0	320
3:00	2	2	36	212	197	45	6	0	0	0	0	0	1	501
4:00	0	2	40	252	169	47	6	0	0	0	0	0	0	516
5:00	1	13	107	286	146	26	2	1	1	0	0	0	2	585
6:00	1	1	43	165	109	28	6	1	0	0	0	0	0	354
7:00	2	2	20	81	60	16	5	0	0	0	0	0	0	186
8:00	0	1	16	120	68	13	4	0	0	0	0	0	0	222
9:00	0	1	7	27	29	10	3	0	0	0	0	0	0	77
10:00	0	0	6	21	24	11	1	1	0	0	0	0	0	64
11:00	0	0	1	9	14	5	0	0	0	0	0	0	0	29
Total	17	44	605	2449	1764	424	75	12	2	2	1	0	5	5400

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/20/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	5	5	3	0	0	0	0	0	0	0	13
1:00	0	0	0	2	3	1	1	0	0	0	0	0	0	7
2:00	0	0	0	1	0	1	0	0	0	0	0	0	0	2
3:00	0	0	1	2	2	2	0	0	0	0	0	0	0	7
4:00	0	0	3	3	5	2	1	0	0	0	0	0	0	14
5:00	0	0	0	20	25	9	2	0	0	0	0	0	0	56
6:00	1	4	21	82	65	23	1	0	0	0	0	0	0	197
7:00	3	17	79	275	172	17	3	1	1	0	0	0	1	569
8:00	0	12	42	228	138	15	3	3	0	0	0	0	1	442
9:00	0	3	18	107	92	17	5	0	1	0	0	0	0	243
10:00	8	1	20	102	78	19	4	0	0	0	0	0	0	232
11:00	2	1	17	104	107	25	3	0	1	0	0	0	0	260
12:00 PM	1	2	22	122	108	29	6	2	0	0	0	0	1	293
1:00	0	1	32	133	102	19	6	0	0	0	0	0	1	294
2:00	2	0	28	146	141	35	4	3	0	0	0	0	0	359
3:00	3	3	56	271	158	39	10	0	0	0	0	1	1	542
4:00	1	7	49	232	165	41	2	2	3	0	0	1	0	503
5:00	0	9	60	210	157	38	4	2	1	1	0	1	2	485
6:00	0	2	24	110	90	24	6	1	0	0	0	0	2	259
7:00	0	0	16	87	78	16	2	0	0	0	0	0	0	199
8:00	0	3	19	60	36	10	6	0	0	0	0	0	0	134
9:00	0	1	13	33	29	14	3	1	1	0	0	0	0	95
10:00	0	0	5	22	28	12	1	1	0	0	0	0	0	69
11:00	0	0	2	8	12	4	4	0	0	0	0	0	0	30
Total	21	66	527	2365	1796	415	77	16	8	1	0	3	9	5304

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/21/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	3	7	3	1	0	0	0	0	0	0	14
1:00	0	0	0	1	2	2	1	0	0	0	0	0	0	6
2:00	0	0	2	0	3	1	0	0	0	0	0	0	0	6
3:00	0	0	0	0	3	3	1	0	0	0	0	0	0	7
4:00	0	0	0	2	3	2	0	0	0	0	0	0	0	7
5:00	0	0	5	13	14	9	0	0	0	0	0	0	0	41
6:00	0	0	11	30	29	7	2	1	0	0	0	0	0	80
7:00	0	0	7	69	61	13	3	0	0	0	0	0	0	153
8:00	0	1	24	89	99	21	3	3	0	0	0	0	0	240
9:00	0	4	16	144	153	35	5	3	0	0	0	0	0	360
10:00	0	1	10	130	121	32	8	2	0	1	0	0	0	305
11:00	0	1	27	160	135	36	12	0	0	0	1	0	2	374
12:00 PM	0	3	24	157	148	39	4	0	0	0	0	0	0	375
1:00	1	2	15	135	141	39	5	3	1	0	0	0	1	343
2:00	0	3	26	110	119	35	5	0	0	0	0	0	0	298
3:00	0	5	20	110	117	38	8	1	0	1	0	0	1	301
4:00	2	6	27	157	127	31	7	1	0	0	0	0	0	358
5:00	0	8	25	127	120	31	6	3	0	0	1	0	0	321
6:00	1	7	32	143	63	20	3	0	1	0	1	0	0	271
7:00	2	12	46	75	36	9	2	0	0	0	0	0	0	182
8:00	2	11	39	94	34	7	0	0	0	0	0	0	0	187
9:00	0	0	11	39	31	9	3	2	0	0	0	0	0	95
10:00	0	0	5	30	21	10	2	0	0	0	0	0	0	68
11:00	0	0	3	9	17	6	0	0	0	0	0	0	0	35
Total	8	64	375	1827	1604	438	81	19	2	2	3	0	4	4427

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/22/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	4	10	3	1	0	2	0	0	0	0	20
1:00	0	0	0	1	3	0	0	1	0	0	0	0	0	5
2:00	0	0	1	1	0	1	2	0	0	0	0	0	0	5
3:00	0	0	1	4	1	2	1	0	0	0	0	0	0	9
4:00	0	1	0	2	4	1	1	0	0	0	0	0	0	9
5:00	0	0	1	5	10	8	0	0	0	0	0	0	0	24
6:00	0	0	4	18	21	8	1	0	0	0	0	0	0	52
7:00	0	0	3	38	45	9	1	0	0	0	0	1	0	97
8:00	1	3	13	90	63	19	4	1	0	0	0	0	0	194
9:00	0	0	17	95	103	28	10	0	0	0	0	0	0	253
10:00	1	0	24	141	108	22	5	1	0	1	0	0	0	303
11:00	0	0	28	143	122	28	4	1	0	0	0	0	0	326
12:00 PM	2	1	10	109	139	48	9	2	0	0	0	0	0	320
1:00	2	0	12	141	135	36	9	0	1	0	0	0	0	336
2:00	1	3	28	119	113	38	3	0	0	0	0	1	1	307
3:00	0	1	9	81	151	43	4	0	0	0	1	0	0	290
4:00	0	8	21	121	97	47	12	1	1	1	0	0	0	309
5:00	0	0	35	96	91	29	5	1	0	0	0	0	0	257
6:00	0	1	17	91	89	23	6	1	2	0	0	0	0	230
7:00	0	2	17	61	61	12	5	0	0	0	0	0	0	158
8:00	0	0	10	42	40	18	2	0	0	0	0	0	0	112
9:00	0	0	5	19	21	6	5	1	0	0	0	0	0	57
10:00	0	0	0	5	12	4	0	0	0	0	0	0	0	21
11:00	0	0	1	1	2	3	1	0	0	0	0	0	0	8
Total	7	20	257	1428	1441	436	91	10	6	2	1	2	1	3702

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/23/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	0	2	1	1	0	0	1	0	0	0	0	5
1:00	0	0	0	2	2	2	0	0	0	0	0	0	0	6
2:00	0	0	0	0	1	1	0	0	0	0	0	0	0	2
3:00	0	0	0	0	0	1	0	0	0	0	0	0	0	1
4:00	0	0	3	2	7	3	0	0	0	0	0	0	0	15
5:00	0	0	2	22	31	9	4	1	0	0	0	0	0	69
6:00	0	0	24	65	81	17	2	0	1	0	0	1	0	191
7:00	4	9	82	304	147	15	3	0	0	0	0	0	1	565
8:00	0	6	41	216	122	28	6	0	2	0	1	0	1	423
9:00	2	0	32	114	78	16	5	1	0	0	0	0	0	248
10:00	0	0	25	101	74	9	2	0	0	0	0	0	0	211
11:00	0	3	27	121	74	22	2	0	0	0	0	0	0	249
12:00 PM	1	0	25	130	71	14	7	1	0	0	0	0	0	249
1:00	0	0	30	112	88	22	3	0	0	0	0	0	1	256
2:00	0	9	44	149	79	27	5	1	0	0	0	0	0	314
3:00	1	6	56	247	162	28	6	0	0	0	0	0	0	506
4:00	0	10	68	231	200	46	6	0	0	0	2	1	2	566
5:00	2	13	68	235	150	30	2	1	0	0	0	0	0	501
6:00	0	2	30	193	94	17	2	2	0	0	0	0	0	340
7:00	0	0	12	99	82	11	1	0	0	0	0	0	0	205
8:00	1	1	14	53	24	12	4	1	0	0	0	0	1	111
9:00	0	0	4	29	12	10	3	0	0	0	0	0	0	58
10:00	0	0	1	8	3	4	3	1	0	0	0	0	0	20
11:00	0	0	0	5	6	2	0	0	0	0	0	0	0	13
Total	11	59	588	2440	1589	347	66	9	4	0	3	2	6	5124

CHITTENDEN COUNTY RPC
Communities Planning Together

Site Code: JERI42
Station ID:
Location 1:
Location 2:
Location 3:
Location 4:
Direction: Combined

Location ID: JERI42: Browns Trace Road South of Center
Municipality: Town: Jericho
Direction: Dir 1 - SB, Dir 2 - NB
Staff: Counters: CD, MD, EF
Latitude: 0.000000
Longitude: 0.000000

9/24/2024 Time	0 - 15 MPH	> 15 - 20 MPH	> 20 - 25 MPH	> 25 - 30 MPH	> 30 - 35 MPH	> 35 - 40 MPH	> 40 - 45 MPH	> 45 - 50 MPH	> 50 - 55 MPH	> 55 - 60 MPH	> 60 - 65 MPH	> 65 - 70 MPH	> 70 MPH	Total
12:00 AM	0	0	2	4	2	0	0	0	0	0	0	0	0	8
1:00	0	0	0	2	0	3	0	0	0	0	0	0	0	5
2:00	0	0	1	1	2	0	0	1	0	0	0	0	0	5
3:00	0	0	0	1	4	1	0	0	0	0	0	0	0	6
4:00	0	0	1	5	1	1	1	0	0	0	0	0	0	9
5:00	0	0	2	15	31	9	1	0	2	0	0	0	0	60
6:00	0	0	22	107	61	13	3	0	0	0	0	0	0	206
7:00	6	11	59	329	161	19	3	0	1	0	0	0	0	589
8:00	4	9	43	206	132	31	2	0	0	0	0	0	1	428
9:00	1	0	16	93	118	38	7	1	0	0	0	0	0	274
10:00	2	1	14	81	73	26	7	2	0	0	1	0	0	207
11:00	0	0	9	92	115	41	8	1	0	0	0	0	0	266
12:00 PM	1	2	15	117	96	39	5	1	0	0	0	0	0	276
1:00	0	2	30	121	84	26	4	0	0	0	0	0	0	267
2:00	1	0	14	158	123	29	8	1	0	0	0	0	0	334
3:00	3	1	36	240	178	55	8	1	0	0	0	0	0	522
4:00	2	7	66	209	203	61	11	2	2	0	1	0	1	565
5:00	5	3	65	228	179	47	5	0	0	0	0	0	0	532
6:00	1	4	42	212	124	18	7	0	0	0	0	0	1	409
7:00	0	0	8	85	70	15	3	0	0	0	0	1	0	182
8:00	0	1	4	41	55	12	9	0	0	0	0	0	0	122
9:00	0	0	4	19	22	7	7	0	0	0	1	0	0	60
10:00	0	0	1	5	8	4	1	0	1	0	0	0	0	20
11:00	0	0	1	0	9	1	0	0	0	0	0	0	0	11
Total	26	41	455	2371	1851	496	100	10	6	0	3	1	3	5363
Grand Total	105	316	3137	14324	11183	2844	534	79	33	8	12	8	33	32616

Stats	Percentile	15th	50th	85th	95th
	Speed	25	29	33	36

Mean Speed (Average)	30.3
10 MPH Pace Speed	26-35
Number in Pace	25498
Percent in Pace	78.0%
Number > 45 MPH	173
Percent > 45 MPH	0.5%